

Attorney's Docket No.: 442-010303-US(PAR)

PATENT

#3  
1c903 U.S. PTO  
09/864007  
05/23/01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Express Mail No.: EL627426535US  
In re application of: Arto LEHTONEN  
Serial No.: 0 /  
Filed: Herewith  
For: HANDS-FREE FUNCTION

Group No.:

Examiner:

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country : Finland  
Application Number : 20001274  
Filing Date : 26 May 2000

**WARNING:** "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 CFR 1.4(f) (emphasis added.)

  
SIGNATURE OF ATTORNEY

Reg. No.: 24,622

Clarence A. Green

Type or print name of attorney

Tel. No.: (203) 259-1800

Perman & Green, LLP

Customer No.: 2512

P.O. Address

425 Post Road, Fairfield, CT 06430

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

(Transmittal of Certified Copy [5-4])

PATENTTI- JA REKISTERIHALLITUS  
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 6.4.2001

ETUOIKEUSTODISTUS  
PRIORITY DOCUMENT



Hakija  
Applicant

Nokia Mobile Phones Ltd  
Espoo

Patenttihakemus nro  
Patent application no

20001274

Tekemispäivä  
Filing date

26.05.2000

Kansainvälinen luokka  
International class

H04M

Keksinnön nimitys  
Title of invention

"Kädet vapaana -toiminto"

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

  
Pirjo Kaila  
Tutkimussihteeri

Maksu 300,- mk  
Fee 300,- FIM

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328  
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328  
FIN-00101 Helsinki, FINLAND

## Kädet vapaana -toiminto – Hands free -funktion

- 5 Esillä oleva keksintö koskee matkaviestimen (engl. mobile station) kädet vapaana -toimintoa (engl. handsfree).

- 10 Markkinoilta on saatavissa useita erilaisia matkaviestimen lisälaitteita (engl. accessories), joiden avulla voidaan toteuttaa kädet vapaana -toiminto. Ericsson valmistaa matkapuhelimen lisälaitetta HPR-08. HPR-08 käsittää kaksi korvakuuloketta (engl. earpiece), mikrofonin ja FM-radiomodulin. Kuulokkeet, mikrofoni ja FM-radiomoduli on yhdistetty toisiinsa johdolla (engl. cord). FM-radiomoduli voidaan kiinnittää tiettyjen matkapuhelinmallien (esim. Ericsson T10) pohjaliittimeen. Tällöin on mahdollista kuunnella kuulokkeilla radiota. Puhelun tullessa radio vaimenee (engl. is muted) automaattisesti, jolloin puheluun
- 15 vastaamisen (painetaan esimerkiksi matkapuhelimen yes-näppäintä) jälkeen voidaan kuulokkeita käyttää puhelun kuuntelemiseen ja mikrofonia puhumiseen.

- 20 Kädet vapaana -toiminto voidaan toteuttaa myös Ericssonin matkaviestimen lisälaitteella HPM-10. HPM-10 käsittää kaksi stereo-korvakuuloketta, mikrofonin ja MP3-soittimen (engl. MP3 audio player). Kuulokkeet, mikrofoni ja MP3-soitinmoduli on yhdistetty toisiinsa johdolla, jossa on myös nappi puhelun vastaamiseksi. MP3-soitinmoduli voidaan kiinnittää tiettyjen matkapuhelinmallien (esim. Ericsson T10) pohjaliittimeen. MP3-soitinmoduli saa virran (engl. is powered) matkapuhelimesta. Tällöin on mahdollista kuunnella kuulokkeilla
- 25 musiikkia MP3-soittimesta. Puhelun tullessa MP3-soitin vaimenee automaattisesti, jolloin puheluun vastaamisen (painetaan esimerkiksi nappia, joka on johdossa) jälkeen voidaan kuulokkeita käyttää puhelun kuuntelemiseen ja mikrofonia puhumiseen.

- 30 Dokumentti US 5,978,689 (kuvio 1) esittelee toteutuksen, jossa audiolaitte ja radiopuhelin on integroitu samaan koteloon 10 (engl. housing). Toteutus käsittää myös kuulokkeet 11, jotka on yhdistetty toisiinsa pannalla 12 sekä mikrofonin 13. Kotelo 10 ja kuuloke-mikrofoni-yhdistelmä 11-13 voidaan liittää yhteen johdolla 14.

- Tätä varten kotelo 10 käsittää liittimen 15 (engl. jack), johon johdon 14 päähän sijoitettu pistoke 16 (engl. plug) voidaan työntää. Kun mikrofoni 13 on ylä-asennossa, kuulokkeilla 11 voidaan kuunnella audiolaitteen audio-ohjelmaa. Kun mikrofoni 13 siirretään ala-asentoon, kuulokkeita 11 ja mikrofonia 13 voidaan
- 5 käyttää puhelun kuuntelemiseen ja puhumiseen.

- Nyt on tehty keksintö, jossa kädet vapaana –toimintoa on kehitetty edelleen. Keksinnön erään ensimmäisen aspektin mukaan on toteutettu laitteisto kädet vapaana –toiminnon toteuttamiseksi, joka laitteisto käsittää matkaviestimen ja
- 10 kuulokelaitteen (engl. headset), joka laitteisto käsittää:

välineet puhelun audiosignaalin siirtämiseksi matkaviestimen ja kuulokelaitteen välillä puhelun suorittamiseksi kädet vapaina.

Laitteistolle on tunnusomaista, että matkaviestin ja kuulokelaite kumpikin käsittävät:

- 15 lyhyen kantaman radiolähetinvastaanottimen tiedostojen siirtämiseksi langattomasti matkaviestimen ja kuulokelaitteen välillä, ja että kuulokelaite käsittää:
- muistivälineen tiedostojen tallentamiseksi.

- 20 Keksinnön erään toisen aspektin mukaan on toteutettu kuulokelaite, joka käsittää välineet puhelun audiosignaalin siirtämiseksi kuulokelaitteen ja määrätyn matkaviestimen välillä.

Kuulokelaitteelle on tunnusomaista, että kuulokelaite käsittää:

- 25 lyhyen kantaman radiolähetinvastaanottimen tiedostojen siirtämiseksi langattomasti mainitun matkaviestimen ja kuulokelaitteen välillä, ja muistivälineen tiedostojen tallentamiseksi.

- Keksinnön mukaan kuulokelaitteeseen tai kuulokelaitteen yhteyteen sijoitetaan muistiväline, joka voi olla esimerkiksi muistikorttipaikka, johon on irrotettavasti
- 30 liitettävissä muistikortti. Vaihtoehtoisesti tai lisäksi kuulokelaitteeseen voidaan sijoittaa kiinteää muistia (engl. fixed memory). Kiinteään muistiin tai muistikorttipaikkaan irrotettavasti liitettävään muistikorttiin voidaan päätelaitteesta keksinnön mukaisesti siirtää tiedostoja langattomasti lyhyen kantaman

radioyhteyden yli. Tätä varten sekä päätelaite että kuulokelaite käsittävät lyhyen kantaman radiolähetinvastaanotton, esim. LPRF-lähetinvastaanotin (Low Power Radio Frequency). Keksinnön erään sovellutusmuodon mukaan päätelaite on solukko-verkon matkaviestin (engl. mobile station).

5

LPRF-yhteys on kaksipisteyhteys (engl. point-to-point connection), jossa informaatiota, joka voi olla esimerkiksi dataa, puhetta tai videokuvaa, siirretään radioteitse käyttämällä pientä siirtotehoa. Bluetooth-teknologia on eräs esimerkki LPRF-yhteyttä käyttävästä standardoidusta teknologiasta. Lyhyellä kantamalla tarkoitetaan tässä noin kymmenen metrin matkaa.

10

Mainitut tiedostot ovat keksinnön edullisessa sovellutusmuodossa käyttäjätiedostoja. Käyttäjätiedostoilla tarkoitetaan esimerkiksi käyttäjän luomia, muokkaamia tai tallentamia tiedostoja. Käyttäjätiedostot voivat olla esimerkiksi multimediaa käsittäviä tiedostoja, kuten AVI-formaatissa olevia multimediatiedostoja tai MPEG-standardin mukaan koodattuja audio/video – tiedostoja tai musiikkitiedostoja, kuten MP3-musiikkitiedostoja. Keksinnön erään sovellutusmuodon mukaan kuulokelaite käsittää multimediasoitimen, kuten MP3-soittimen, joka dekodaa kuulokelaitteen muistivälineelle tallennetun multimediatiedoston, kuten MP3-musiikkitiedoston. Käyttäjä voi vaihtoehtoisesti joko kuunnella multimediasoitimen dekodamaa musiikkia kuulokelaitteen korvakuulokkeista (engl. earpiece) tai puhelun tullessa kuunnella puhelua korvakuulokkeista ja puhua mikrofonin kädet vapaana –toimintoa käyttäen.

15

20

25

Edelleen, keksinnön erään sovellutusmuodon mukaan multimediasoitin toistaa multimediatiedostoa, joka käsittää sekä kuvan että äänen. Kuulokelaite käsittää tässä sovellutusmuodossa korvakuulokkeiden lisäksi erillisen näyttöelimen, jolloin käyttäjä voi seurata liikkuvaa kuvaa näyttöelimen avulla ja kuunnella ääntä korvakuulokkeilla.

30

Keksinnön erään sovellutusmuodon mukaan kuulokelaitteen käsittämät korvakuulokkeet, jotka kumpikin käsittävät kaiuttimen (engl. speaker), ovat

mekaanisesti yhdistetyt toisiinsa pannalla. Pantaan on sijoitettu elektroniikkamoduli, joka käsittää muistikorttipaikan, lyhyen kantaman radiolähetinvastaanottimen ja multimediasoittimen. Kuulokelaitteen ja multimediasoittimen käyttöliittymä tuodaan LPRF-yhteyden yli päätelaitteeseen.

5

Keksinnön eräänä etuna on se, että sijoittamalla muistikortti kuulokelaitteeseen pystytään päätelaitteen koko pitämään pienenä. Lisäksi, päätelaitteen ollessa matkaviestin voidaan päätelaitteen valmiusaikaa keksinnön mukaan pidentää tekniikan tason mukaiseen ratkaisuun verrattuna, koska keksinnössä kuulokelaitteen virransyöttö hoidetaan nyt matkaviestimestä riippumatta akulla, joka on sijoitettu kuulokelaitteen yhteyteen. Etuna on myös se, että enää ei LPRF-yhteyden takia tarvita häiritsevää johtoa kuulokelaitteen ja päätelaitteen välille. Eräänä lisäetuna on myös se, että erillistä tilaavievää MP3-soitinmodulia ei enää tarvitse kiinnittää päätelaitteeseen, kuten tekniikan tason mukaisissa ratkaisuissa, koska muistikortti ja multimediasoitin, kuten MP3-soitin, sijoitetaan keksinnön edullisen sovellutusmuodon mukaan kuulokelaitteeseen. Samalla vapautuu päätelaitteen (esim. matkaviestin/-puhelin) muistia, koska muistikortti, jolla multimediatiedostoja säilytetään, on nyt sijoitettu kuulokelaitteeseen. Vaikka elektroniikkamoduli (käsittäen muun muassa muistikorttipaikan elektroniikkoinen) sijoitetaankin nyt kuulokelaitteeseen tai kuulokelaitteen yhteyteen, ei kuulokelaitteen koko silti merkittävästi suurene, koska kuulokelaitteen käyttöliittymä sijoitetaan päätelaitteeseen.

Keksintöä selostetaan seuraavassa yksityiskohtaisesti viittaamalla oheisiin piirustuksiin, joissa

25 kuvio 1 esittää erästä tekniikan tason mukaista toteutusta kädet vapaana –toiminnon toteuttamiseksi,

30 kuvio 2 esittää keksinnön edullista sovellutusmuotoa,

kuvio 3 on lohkokaavio esittäen keksinnön mukaista kuulokelaitetta ja päätelaitetta,

kuvio 4 esittää erästä keksinnön vaihtoehtoista sovellutusmuotoa, ja

5 kuviot 5a ja 5b esittävät pelkistetyksi kuulokelaitteen käyttöliittymää päätelaitteen näytöllä.

Kuvio 1 on selitetty edellä tekniikan tason selostuksen yhteydessä. Kuviossa 2 havainnollistetaan keksinnön edullista sovellutusmuotoa. Keksinnön edullinen sovellutusmuoto käsittää kuulokelaitteen 21 ja solukoverkon matkapuhelimen 22.

10

Kuulokelaite 21 käsittää kaksi stereokorvakuuloketta 23 (oikea ja vasen), jotka kumpikin puolestaan käsittävät kaiuttimen 24 musiikin toistamiseksi stereona. Lisäksi kuulokelaite 21 käsittää mikrofonin 25, pannaan 26 ja elektroniikkamodulin 27. Elektroniikkamodulin, joka muun muassa käsittää lyhyen kantaman radiolähetinvastaanottimen Bluetooth-lähetinvastaanottimen Bluetooth-yhteyden 29 muodostamiseksi kuulokelaitteen 21 ja matkapuhelimen 22 välille, yksityiskohtia selostetaan lähemmin kuvion 3 selostuksen yhteydessä. Panta 26 on kooltaan sovitettu siten, että kun kuulokelaite asetetaan ihmisen päähän, korvakuulokkeet 23 asettuvat korvien kohdalle. Elektroniikkamoduli 27 on edullisesti sijoitettu kiinni pantaan 26. Kiinnitys tapahtuu tarkoituksenmukaisella kiinnitysmekanismin, kuten esimerkiksi tarralla tai niitillä (ei esitetty kuviossa). Elektroniikkamoduli 27, korvakuulokkeet 23 ja mikrofoni 25 yhdistetään sähköisesti toisiinsa johtimilla (ei näytetty kuviossa).

25 Vaihtoehtoisesti (ks. kuvio 4), jos panta 26 ei käytetä, voidaan korvakuulokkeet 23 tehdä pienemmiksi ja kevyemmiksi, jolloin ne voidaan työntää korviin. Kuulokelaitteen elektroniikkamoduli 27 voidaan järjestää erilliseksi kannettavaksi moduli, jolloin kuulokelaitteen korvakuulokkeet ja elektroniikkamoduli voidaan yhdistää johdoilla 28 ja myös mikrofoni 25 voidaan asettaa johtoon, jolloin se on 30 käyttöasennossaan ihmisen suun tai kurkun lähetyvillä. Tällöin, kun korvakuulokkeet 23 ovat käyttäjän korvissa, elektroniikkamodulia 27 voidaan pitää esimerkiksi käyttäjän rintataskussa. Elektroniikkamodulin käsittämä elektroniikka voi esimerkiksi painaa noin 50-100 grammaa.

Vaihtoehtoisesti kuulokelaite ei käsitä ollenkaan mikrofonia. Tällöin voidaan matkapuhelimeen esimerkiksi sijoittaa suuntaava mikrofoni, jota matkapuhelimen käyttäjä voi käyttää kädet vapaana –toiminnossa.

5

Kuviossa 3 on esitetty kuulokelaitteen 21 ja matkapuhelimen 22 lohkokaaaviot. Kuulokelaitteen elektroniikkamoduli 27 käsittää prosessointiyksikön (engl. processing unit), joka käsittää suorittimen (engl. processor) MCU (Master Controlling Unit). Tämä voi olla esimerkiksi mikrokontrolleri, mikroprosessori tai

10

Prosessointiyksikkö käsittää muistin, joka käsittää MP3-soittimen eli MP3-soitinsovelluksen (engl. MP3 player application), WAP-palvelinsovelluksen (engl. WAP server application, Wireless Application Protocol), WAP- ja Bluetooth-protokollat sekä muistikorttiajurin. MP3-soitinsovellus osaa dekodata MP3-formaattiin koodattuja musiikkitiedostoja. WAP-palvelinsovellusta käytetään kuulokelaitteen käyttöliittymän siirtämiseen matkapuhelimeen. Tiedonsiirto kuulokelaitteen ja matkapuhelimen välillä tapahtuu edullisesti WAP- ja Bluetooth-protokollia käyttämällä Bluetooth-yhteyden 29 yli. Muistikorttiajuri on tietokoneohjelma, joka ohjaa tiedonsiirtoa muistikorttipaikkaan asetetulta muistikortilta ja muistikortille.

15

20

25

30

Elektroniikkamoduli 26 käsittää Bluetooth-lähetinvastaanottimen BT2, joka kykenee Bluetooth-protokollien mukaisesti lähettämään ja vastaanottamaan informaatiota 2,4 GHz:n taajuusalueella antenninsa ANT2 avulla. Antenni ANT2 voi olla elektroniikkamodulin kuoren sisään rakennettu antenni. Vaihtoehtoisesti se voi olla ulkoinen antenni. Lisäksi elektroniikkamoduli käsittää virtalähteenä, esimerkiksi litium-polymeeri-akun (Li-Pol). Akkua ei ole esitetty kuviossa 3. Kuviossa 3 on esitetty myös kuulokelaitteen 21 mikrofoni 25, sekä A/D muunnin, jossa mikrofonilta prosessointiyksikölle tuleva analoginen audiosignaali muutetaan digitaaliseen muotoon. Edelleen kuviossa 3 on esitetty korvakuulokkeissa 23 sijaitsevat oikea ja vasen kaiutin 24a, 24b, sekä D/A-muuntimet, jotka muuntavat prosessointiyksiköltä korvakuulokkeille 23 tulevan digitaalisen audiosignaalin



analogiseksi signaaliksi.

Kuulokelaite 21 käsittää myös napin 31, jota painamalla kuulokelaitteesta käsin voidaan vastata matkapuhelimeen 22 tulevaan puheluun. Vaihtoehtoisesti  
 5 kuulokelaite 21 voi käsittää mikrofonin 25 asennon ilmaisevan kytkimen, jolloin puheluun vastaaminen voi tapahtua kääntämällä mikrofoni 25 yläasennosta ala-asentoon (kuvio 2). Samantapainen ratkaisu on esitetty dokumentissa US 5,978,689.

10 Vaikkakin kuulokelaitteen 21 käyttöliittymä tuodaan keksinnön mukaan myöhemmin esitettävällä tavalla matkapuhelimen 22 näytölle, voi myös kuulokelaite käsittää alkeellisen käyttöliittymän UI2 (kuvio 3), joka antaa käyttäjälle mahdollisuuden käyttää kuulokelaitetta myös ilman matkapuhelinta. Mainittu alkeellinen käyttöliittymä UI2 voidaan toteuttaa elektroniikkamoduliin sijoitetuilla  
 15 muutamalla napilla 30 (engl. button) (kuvio 2), joilla voidaan esimerkiksi aktivoida musiikin toisto ja toiston pysäytys, ja joilla voidaan manuaalisesti säätää korvakuulokkeiden äänenvoimakkuutta.

Matkapuhelin 22 (kuvio 3) käsittää suorittimen MPU ja suorittimeen toiminnallisesti  
 20 yhdistetyt osat: muistin MEM, käyttöliittymän UI, radio-osan RF ja Bluetooth-lähetinvastaanottimen BT Bluetooth-yhteyden muodostamiseksi matkapuhelimen 22 ja kuulokelaitteen 21 välille. Suoritin MPU on edullisesti mikroprosessori, -kontrolleri tai digitaalinen signaaliprosessori (DSP, digital signal processor). Muisti MEM käsittää pysyvän (haihtumattoman, engl. non-volatile) muistin (ROM, read  
 25 only memory) ja käyttömuistin (RAM, random access memory). Radio-osa RF voi lähettää radiotaajuisia signaaleja, kuten puhetta tai muuta informaatiota koodatussa muodossa, solukkonverkon tukiasemalle ja vastaanottaa signaaleja tukiasemalta antennillaan AER. Käyttöliittymä UI tarjoaa käyttäjälle näytön ja näppäimistön matkapuhelimen 22 käyttämiseksi. Keksinnön mukaan  
 30 kuulokelaitteen 21 käyttöliittymä tuodaan matkapuhelimen käyttöliittymään UI, jolloin matkapuhelimella voidaan ohjata kuulokelaitteen toimintoja. Bluetooth-lähetinvastaanotin BT osaa lähettää ja vastaanottaa Bluetooth-protokollien mukaisesti informaatiota 2,4 GHz:n taajuusalueella antenninsa ANT avulla.

Antenni ANT voi olla sisäänrakennettu antenni. Vaihtoehtoisesti se voi olla ulkoinen antenni.

Matkapuhelimen 22 ohjelmisto (engl. software) on tyypillisesti tallennettu pysyvään muistiin. Suoritin MPU ohjaa ohjelmiston perusteella matkapuhelimen 22 toimintaa, kuten radio-osan RF ja Bluetooth-lähetinvastaanottimen BT käyttöä, informaation esittämistä käyttöliittymällä UI ja käyttöliittymältä UI vastaanotettavien syötteiden lukemista. Ohjelmisto käsittää WAP- ja Bluetooth-protokollat sekä WAP-selainsovelluksen (engl. WAP browser application), eli niin sanotun mikroselaimen (engl. micro browser). Käyttömuistia suoritin MPU käyttää väliaikaisena puskurimuistina tietoja prosessoidessaan. WAP-selainsovelluksella voidaan tunnetulla tavalla etsiä ja hakea tiedostoja, kuten musiikkitiedostoja, Internet-verkosta.

Matkapuhelimeen 22 tuodaan keksinnön mukaan kuulokelaitteen 21 käyttöliittymä. Tämä tapahtuu edullisesti WAP over Bluetooth –tekniikalla. Kuulokelaitteessa on WAP-palvelinsovellus ja matkapuhelimessa WAP-selainsovellus. WAP-selainsovellus ja WAP-palvelinohjelma kommunikoivat WAP-protokollia käyttäen Bluetooth-yhteyden ylitse. Kuulokelaitteen käyttöliittymä voidaan täten WAP-selainohjelman pyynnöstä siirtää kuulokelaitteesta matkapuhelimeen esimerkiksi WML-sivuna tai sivuina (Wireless Markup Language). WML-sivuihin voidaan yhdistää WML-Script –objekteja. Vaihtoehtoisesti voidaan tehdä oma sovellus, jota voidaan käyttää WAP over Bluetooth –tekniikan sijaan kuulokelaitteen 21 käyttöliittymän siirtämiseen Bluetooth-yhteyden yli matkapuhelimeen 22.

Kuviot 5a ja 5b ovat karkeasti pelkistettyjä esimerkinomaisia kuvia kuulokelaitteen 21 käyttöliittymästä matkapuhelimen 22 näytöllä WML-sivuina, eli niin sanottuna WML-korttipakkana (engl. deck). Kuvio 5a esittää erästä WML-korttipakan korttia eli erästä WML-sivua matkapuhelimen 22 näytöllä 51. Informaation esittämistä näytöllä 51 ohjaa tyypillisesti näytönohjaimeksi kutsuttu matkapuhelimen 22 ohjelmiston osa. Ylimmällä rivillä eli otsikkorivillä 52 näytetään WML-sivun otsikko, joka kuvion 5a tapauksessa on sana "HEADSET". Lisäksi otsikkorivillä voidaan näyttää toistettavan musiikkikappaleen järjestysnumero "TRACK 2" ja/tai

toistettavan musiikkikappaleen nimi "SONG NAME 2". Otsikkorivin 52 lisäksi käyttäjälle näytetään useita toimintosanoja 53. Käyttäjä voi siirtyä haluamansa toimintosanan kohdalle esimerkiksi käyttämällä matkapuhelimen vieritysnäppäintä (engl. scroll key, ei näytetty kuviossa) ja aktivoida kyseessä olevan toiminnon painamalla matkaviestimen enter-näppäintä tai jotakin vastaavaa valintanäppäintä (ei näytetty kuviossa). Alleviivaus toimintosanan 53 alla tarkoittaa kuvion 5a esimerkissä sitä, että kyseisen toiminnon aktivointi avaa matkapuhelimen näytölle WML-korttipakasta uuden kortin eli uuden WML-sivun, jossa on jälleen valittavana uusia toimintoja. PLAY-toiminnon aktivointi aloittaa musiikkitiedoston toiston.

10 PAUSE-toiminto keskeyttää toiston, jolloin toistoa voidaan jatkaa PLAY-toiminnolla siitä kohdasta, jossa toisto keskeytettiin. STOP-toiminto lopettaa toiston. VOLUME DOWN –toiminto pienentää korvakuulokkeiden äänen voimakkuutta. VOLUME UP –toiminto suurentaa korvakuulokkeiden äänen voimakkuutta. PREVIOUS TRACK –toiminnolla aloitetaan toisto edellisen musiikkikappaleen

15 alusta. NEXT TRACK –toiminnolla aloitetaan toisto seuraavan musiikkikappaleen alusta. REPEAT –toiminnolla toistetaan sama kappale uudestaan. OTHER-toiminto avaa uuden WML-sivun, josta löytyy lisää toimintoja, kuten äänen sävyyn (engl. tone) ja tasapainoon liittyviä toimintoja (ei esitetty kuviossa). INDEX –toiminto avaa uuden WML-sivun, jota on havainnollistettu kuviossa 5b.

20

Kuviossa 5b havainnollistettu WML-sivu esittää kuulokelaitteeseen asetetun muistikortin sisältöä hakemistona (engl. index). Hakemisto käsittää tietoja muistikortille tallennetuista musiikkitiedostoista/-kappaleista. Mainitut tiedot voivat musiikkitiedoston/-kappaleen nimen "SONG NAME 1, SONG NAME 2, SONG NAME 3, ..." lisäksi käsittää esimerkiksi musiikkitiedoston/-kappaleen koon. Kuvion 5b tapauksessa musiikkikappaleen SONG NAME 1 koko on 2.14 megatavua, musiikkikappaleen SONG NAME 2 koko on 4.51 megatavua ja musiikkikappaleen SONG NAME 3 koko on 3.38 megatavua.

25

Esitetään seuraavaksi eräs keksinnön mukainen sovellutusmuoto, jossa matkaviestimen 22 käyttäjä voi kuulokelaitetta käyttäen kuunnella musiikkia ja puhua puhelua kädet vapaana –toiminnon avulla. Keksinnön käyttämiseen tarvitaan tässä sovellutusmuodossa kuulokelaite 21 ja solukkonverkon

30

matkapuhelin 22. Solukoverkko voi olla esimerkiksi GSM-verkko (Global System for Mobile Communications), kolmannen sukupolven matkaviestinverkko tai jokin muu matkaviestinverkko.

- 5 Ensi vaiheessa asetetaan kuulokelaitteen 21 muistikorttipaikkaan muistikortti. Muistikortilla voi olla jo etukäteen tallennettuja MP3-musiikkitiedostoja, jotka on tallennettu esimerkiksi tietokonetta apuna käyttäen. Vaihtoehtoisesti voidaan matkapuhelimen WAP-selaimella hakea WAP-protokollien mukaisesti tietoliikenneverkosta, kuten Internet-verkosta, MP3-musiikkitiedostoja
- 10 matkapuhelimeen. MP3-musiikkitiedostot voidaan edelleen siirtää MPU:n toimesta matkapuhelimen Bluetooth-lähetinvastaanottimen kautta Bluetooth-yhteyden ylitse kuulokelaitteen Bluetooth-lähetinvastaanottimelle ja edelleen prosessointiyksikön toimesta muistikorttiajurin kautta muistikorttipaikkaan muistikortille.
- 15 Käyttäjä voi nyt aloittaa musiikkikappaleen toiston joko aktivoimalla PLAY-toiminnon matkapuhelimeen 22 tuodusta kuulokelaitteen 21 käyttöliittymästä tai painamalla kuulokelaitteen alkeellisen käyttöliittymän UI2 nappia 30 (jos alkeellinen käyttöliittymä kuulokelaitteessa on toteutettu). Tällöin kuulokelaitteen MP3-soitinsovellus alkaa dekodata MP3-musiikkitiedostoa ja prosessointiyksikkö
- 20 siirtää dekodatun datan D/A-muuntimille, jotka puolestaan muuntavat datan digitaalisesta analogiseen muotoon korvakuulokkeiden 23 kaiuttimia 24a, 24b varten. Kaiuttimet 24a, 24b muuntavat analogisen signaalin käyttäjän kuunneltavaksi ääneksi.
- 25 Jos käyttäjä nyt haluaa esimerkiksi säätää korvakuulokkeiden 23 äänenvoimakkuutta voimakkaammaksi, tapahtuu se matkapuhelimesta 22 käsin aktivoimalla VOLUME UP –toiminto. Tieto VOLUME UP –toiminnon aktivoinnista siirtyy matkapuhelimen käyttöliittymältä UI prosessorin MPU, Bluetooth-lähetinvastaanottimen BT ja antennin ANT kautta WAP- ja Bluetooth-protokollien
- 30 mukaisesti Bluetooth-yhteyttä 29 pitkin kuulokelaitteeseen 21. Kuulokelaitteessa tieto kulkee antennin ANT2 kautta Bluetooth-lähetinvastaanottimelle BT2 ja sieltä edelleen prosessointiyksikköön. Tällöin prosessointiyksikkö säätää VOLUME UP –toiminnon kyseessä ollessa korvakuulokkeiden 23 äänenvoimakkuutta askeleen

verran ylöspäin. Vastaavalla tavalla liikkuu matkapuhelimelta kuulokelaitteeseen tieto myös muiden toimintojen (esim. STOP, PAUSE jne.) aktivoinnista.

- 5 Kun matkapuhelimeen 22 tulee puhelu musiikin kuuntelemisen aikana, voi käyttäjä vastata puheluun kääntämällä kuulokelaitteen mikrofonin 25 yläasennosta alasentoon, jolloin musiikin toistaminen lakkaa. Vaihtoehtoisesti puheluun voidaan vastata esimerkiksi painamalla matkapuhelimen 22 vastausnäppäintä.

- 10 Kun matkapuhelimen käyttäjä haluaa soittaa puhelun, hän voi soittaa puhelun matkapuhelimella 22. Kuulokelaitteen korvakuulokkeita 23 käyttäjä voi jälleen käyttää puhelun kuuntelemiseen ja mikrofonia 25 puhumiseen. Puhelun kulkiessa kuulokelaitteesta puhelimeen ja edelleen solukoverkon tukiasemalle päin mikrofonin 25 vastaanottama analoginen audiosignaali muutetaan A/D-muuntimessa digitaalseksi signaaliksi, joka siirretään kuulokelaitteen 21
- 15 prosessointiyksikköön. Prosessointiyksikössä suoritin MCU siirtää digitaalisen signaalin Bluetooth-lähetinvastaanottimelle BT2, joka lähettää signaalin radioteitse antennin ANT2 kautta Bluetooth-yhteyden 29 yli matkapuhelimeen 22. Matkapuhelimessa signaali otetaan vastaan antennin ANT kautta Bluetooth-lähetinvastaanottoon BT, josta se siirretään MPU:n käsiteltäväksi ja edelleen matkapuhelimen radio-osan RF antennin AER kautta solukoverkon tukiasemalle ja edelleen puhelun vastaanottajalle. Puhelun kulkiessa päinvastaiseen suuntaan digitaalinen audiosignaali kulkee em. lohkojen läpi päinvastaisessa järjestyksessä sillä poikkeuksella, että kuulokelaitteessa digitaalinen audiosignaali kulkee prosessointiyksiköltä A/D-muuntimen ja mikrofonin sijaan D/A-muuntimille, joissa
- 20 digitaalinen signaali muutetaan analogiseksi audiosignaaliksi. Analoginen signaali johdetaan kaiuttimille 24a, 24b toistettavaksi.

Matkapuhelimen käyttäjä voi lopettaa puhelun esimerkiksi nostamalla mikrofonin 25 yläasentoon, jolloin musiikin toistaminen voi jatkua. Musiikin toistaminen voi jatkua esimerkiksi automaattisesti siitä kohdasta, mihin toisto keskeytyi puhelun tullessa.

Nykyisellä MP3-kompressiolla 1 Megatavun muistiin mahtuu noin 1 minuutti

musiikkia. Täten esimerkiksi 8 Megatavun muistikortille mahtuu noin 8 minuuttia musiikkia, 16 Megatavun muistikortille noin 16 minuuttia musiikkia ja 64 Megatavun muistikortille reilu tunti musiikkia.

- 5 Vaihtoehtoisesti MP3-soitin voidaan asentaa matkapuhelimeen, jolloin musiikkitiedostoa soittaessa se siirretään ensin Bluetooth-yhteyden yli matkapuhelimeen MP3-soittimen dekodattavaksi. Dekoodattu audiosignaali lähetetään sitten Bluetooth-yhteyden yli kuulokelaitteeseen käyttäjän kuultavaksi.
- 10 Vaihtoehtoisesti kuulokelaitteeseen voidaan integroida myös FM-radiovastaanotin, jolloin käyttäjälle tuodaan mahdollisuus kuunnella muistikortin musiikkitiedostojen lisäksi radio-ohjelmaa. FM-radiovastaanotin on kevyt, joten myös se ja sen alkeellinen käyttöliittymä voidaan sijoittaa kuulokelaitteen pantaan. FM-radiovastaanottimen käyttöliittymä voidaan myös tuoda Bluetooth-yhteyden ylitse
- 15 matkapuhelimen näytölle, kuten muukin kuulokelaitteen käyttöliittymä.

Keksinnön vaihtoehtoisessa sovellutusmuodossa matkapuhelimesta 22 siirretään Bluetooth-yhteyden yli kuulokelaitteelle 21 AVI-formaatissa oleva multimediatiedosto. Kuulokelaite käsittää tässä sovellutusmuodossa

20 korvakuulokkeiden lisäksi erillisen näyttöelimen. Kuulokelaitteessa oleva multimediasoitin dekodaa mainitun AVI-tiedoston, jolloin käyttäjä voi seurata kuvaa näytöltä ja kuunnella ääntä korvakuulokkeilla. Näyttöelimen voi olla esimerkiksi

25 nivelellä kuulokelaitteeseen 21 kiinnitetty näyttö, jonka käyttäjä voi siirtää silmiensä eteen tarvittaessa. Vaihtoehtoisesti voidaan toteuttaa ranne-TV, jonka näytölle kuva voidaan siirtää johtoa pitkin. Vaihtoehtoisesti AVI-formaatin sijaan multimediatiedosto voi olla jossakin muussa multimediaformaattissa, kuten MPEG.

Koska matkapuhelimen fyysinen koko pienenee jatkuvasti, on yhä vaikeampaa integroida muistikorttipaikkoja matkapuhelimeen. Erään markkinoilla olevan

30 muistikortin koko on noin 1x25x32 mm, jolloin muistikorttipaikka vie vielä huomattavasti tätä suuremman tilan matkapuhelimessa. Koska keksinnön edullisen sovellutusmuodon mukaan ainakin yksi muistikorttipaikka sijoitetaan matkapuhelimen sijasta kuulokelaitteeseen, säästyy muistikorttipaikan verran tilaa

matkapuhelimessa. Tilaa säästyy matkapuhelimessa myös sen takia, että myös kyseiseen muistikorttipaikkaan sisältyvä elektroniikka sijoitetaan kuulokelaitteeseen.

- 5 Kuten keksinnön erään vaihtoehtoisen sovellutusmuodon yhteydessä todettiin, muistikortille käyttäjä voi Bluetooth-yhteyden yli siirtää varastoon muutakin informaatiota kuin musiikkitiedostoja, esimerkiksi audio/video -tiedostoja tai muita multimediatiedostoja, joille ei ole tilaa matkaviestimen rajallisessa (esim. 4 Megatavua) muistissa. Mainitut tiedostot voidaan siirtää muistikortilta takaisin
- 10 Bluetooth-yhteyden ylitse matkapuhelimeen, jos ja kun käyttäjä niitä tarvitsee matkapuhelimessa. Siirtoa ohjaa matkapuhelimen suoritin MPU. Siirtämällä tiedostoja matkapuhelimen muistista muistikortille kuulokelaitteeseen voidaan matkapuhelimen muistia vapauttaa.
- 15 Vaihtoehtoisesti voidaan kuulokelaitteen elektroniikkamoduliin muistikorttipaikan ja muistikortin sijaan tai lisäksi sijoittaa kiinteää muistia, joka on käytettävissä matkapuhelimen käyttäjän musiikki- tai muille tiedostoille.

Tässä selityksessä on esitetty keksinnön toteutusta ja sovellutusmuotoja esimerkkien avulla. Alan ammattimiehelle on ilmeistä, ettei keksintö rajoitu edellä esitettyjen sovellutusmuotojen yksityiskohtiin ja että keksintö voidaan toteuttaa muussakin muodossa poikkeamatta keksinnön tunnusmerkeistä. Esimerkiksi keksintöön liittyvä tietokoneohjelmisto (engl. software) voidaan toteuttaa monella eri tavalla. Edelleen, kuulokelaite voi käsittää kahden korvakuulokkeen sijaan vain yhden korvakuulokkeen. Kuulokelaitteessa voi myös olla useampia kaiuttimia kuin kaksi. Esitettyjä sovellutusmuotoja tulisi pitää valaisevina, muttei rajoittavina. Siten keksinnön toteutus- ja käyttömahdollisuuksia rajoittavatkin ainoastaan oheistetut patenttivaatimukset. Täten vaatimusten määrittelemät erilaiset keksinnön toteutusvaihtoehdot, myös ekvivalenttiset toteutukset kuuluvat keksinnön piiriin.

Patenttivaatimukset

1. Laitteisto kädet vapaana –toiminnon toteuttamiseksi, joka laitteisto käsittää matkaviestimen (22) ja kuulokelaitteen (21), joka laitteisto käsittää:

5 välineet puhelun audiosignaalin siirtämiseksi matkaviestimen (22) ja kuulokelaitteen (21) välillä puhelun suorittamiseksi kädet vapaana, **tunnettu** siitä, että matkaviestin (22) ja kuulokelaite (21) kumpikin käsittävät:

10 lyhyen kantaman radiolähetinvastaanottimen (BT, BT2) tiedostojen siirtämiseksi langattomasti matkaviestimen (22) ja kuulokelaitteen (21) välillä, ja että kuulokelaite käsittää:  
muistivälineen tiedostojen tallentamiseksi.

2. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite (21) on järjestetty:

15 vastaanottamaan määrätyn tiedoston matkaviestimeltä (22) lyhyen kantaman radiolähetinvastaanottimella (BT2); ja  
tallentamaan mainitun tiedoston kuulokelaitteen (21) yhteyteen.

3. Patenttivaatimuksen 1 tai 2 mukainen laitteisto, **tunnettu** siitä, että mainitut tiedostot ovat käyttäjätiedostoja.

4. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite (21) käsittää muistivälineenä yhden seuraavista: kiinteä muisti, muistikorttipaikka, johon on irrotettavasti liitettävissä muistikortti.

5. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite (21) käsittää kaiuttimen (24) ja mikrofonin (25).

6. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite (21) käsittää käyttöliittymän ja että matkaviestin (22) on järjestetty ohjaamaan kuulokelaitteen käyttöliittymää lyhyen kantaman radioyhteyden (29) yli.

7. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite



käsittää multimediasoitin.

8. Patenttivaatimuksen 7 mukainen laitteisto, **tunnettu** siitä, että kuulokelaite (21) käsittää kaksi korvakuuloketta (23) ja multimediasoitinena audiosoitin, joka audiosoitin on järjestetty soittamaan musiikkia korvakuulokkeisiin.

9. Patenttivaatimuksen 8 mukainen laitteisto, **tunnettu** siitä, että audiosoitin on järjestetty soittamaan musiikkia dekodamalla musiikkitiedostoa, joka musiikkitiedosto on tallennettu mainitulle kuulokelaitteen muistivälineelle.

10. Patenttivaatimuksen 7 mukainen laitteisto, **tunnettu** siitä, että multimediasoitin käsittää joukon toimintoja, ja että matkaviestin (22) on järjestetty ohjaamaan mainittuja toimintoja lyhyen kantaman radioyhteyden (29) yli.

11. Patenttivaatimuksen 1 mukainen laitteisto, **tunnettu** siitä, että matkaviestin on yksi seuraavista: solukkonetverkon matkaviestin, matkapuhelin.

12. Patenttivaatimuksen 1 mukainen menetelmä, **tunnettu** siitä, että mainittu lyhyen kantaman radioyhteys (29) on Bluetooth-yhteys.

13. Kuulokelaite, joka käsittää välineet puhelun audiosignaalin siirtämiseksi kuulokelaitteen (21) ja määrätyn matkaviestimen (22) välillä, **tunnettu** siitä, että kuulokelaite käsittää:

lyhyen kantaman radiolähetinvastaanottimen (BT2) tiedostojen siirtämiseksi langattomasti mainitun matkaviestimen (22) ja kuulokelaitteen (21) välillä, ja

muistivälineen tiedostojen tallentamiseksi.

14. Patenttivaatimuksen 13 mukainen kuulokelaite, **tunnettu** siitä, että kuulokelaite (21) käsittää kaksi korvakuuloketta (23), jotka ovat pannalla (26) toisiinsa yhdistetyt.

15. Patenttivaatimuksen 14 mukainen kuulokelaite, **tunnettu** siitä, että mainittu panta (26) käsittää elektroniikkamodulin (27), joka käsittää mainitun muistivälineen ja lyhyen kantaman radiolähetinvastaanottimen (BT2).

5

16. Patenttivaatimuksen 15 mukainen kuulokelaite, **tunnettu** siitä, että mainittu elektroniikkamoduli lisäksi käsittää multim mediasoitin.




### (57) Tiivistelmä

Keksinnön kohteena on laitteisto kädet vapaana -toiminnon toteuttamiseksi, joka laitteisto käsittää matkaviestimen (22) ja kuulokelaitteen (21). Laitteisto käsittää välineet puhelun audiosignaalin siirtämiseksi matkaviestimen (22) ja kuulokelaitteen (21) välillä puhelun suorittamiseksi kädet vapaina. Matkaviestin (22) ja kuulokelaite (21) kumpikin käsittävät lyhyen kantaman radiolähetinvastaanotton (BT, BT2) tiedostojen siirtämiseksi langattomasti matkaviestimen (22) ja kuulokelaitteen (21) välillä. Kuulokelaite käsittää muistivälineen tiedostojen tallentamiseksi kuulokelaitteeseen. Keksinnön kohteena on myös kuulokelaite (21).

Kuvio 3.




1/5


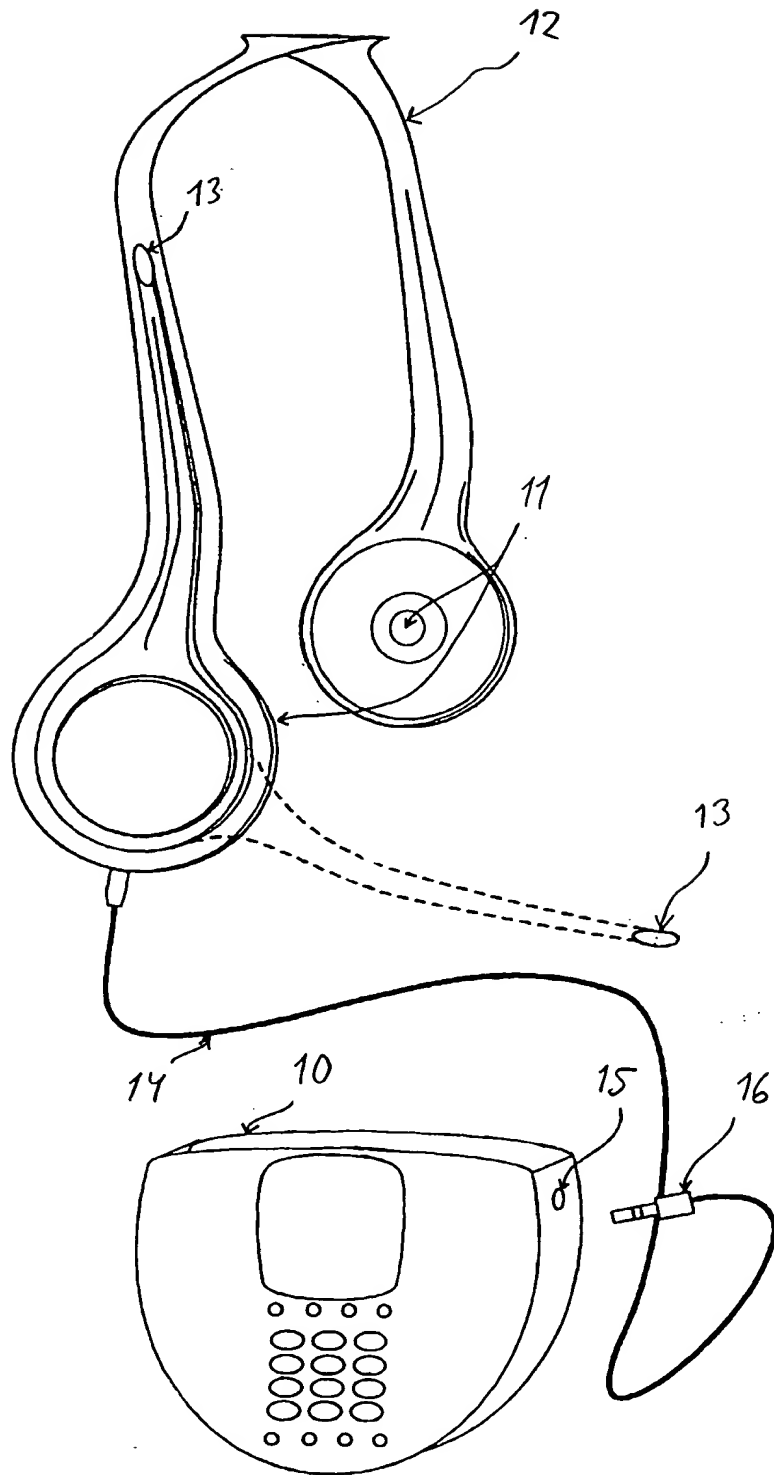


KUVIO 1  
PRIOR ART

2/5

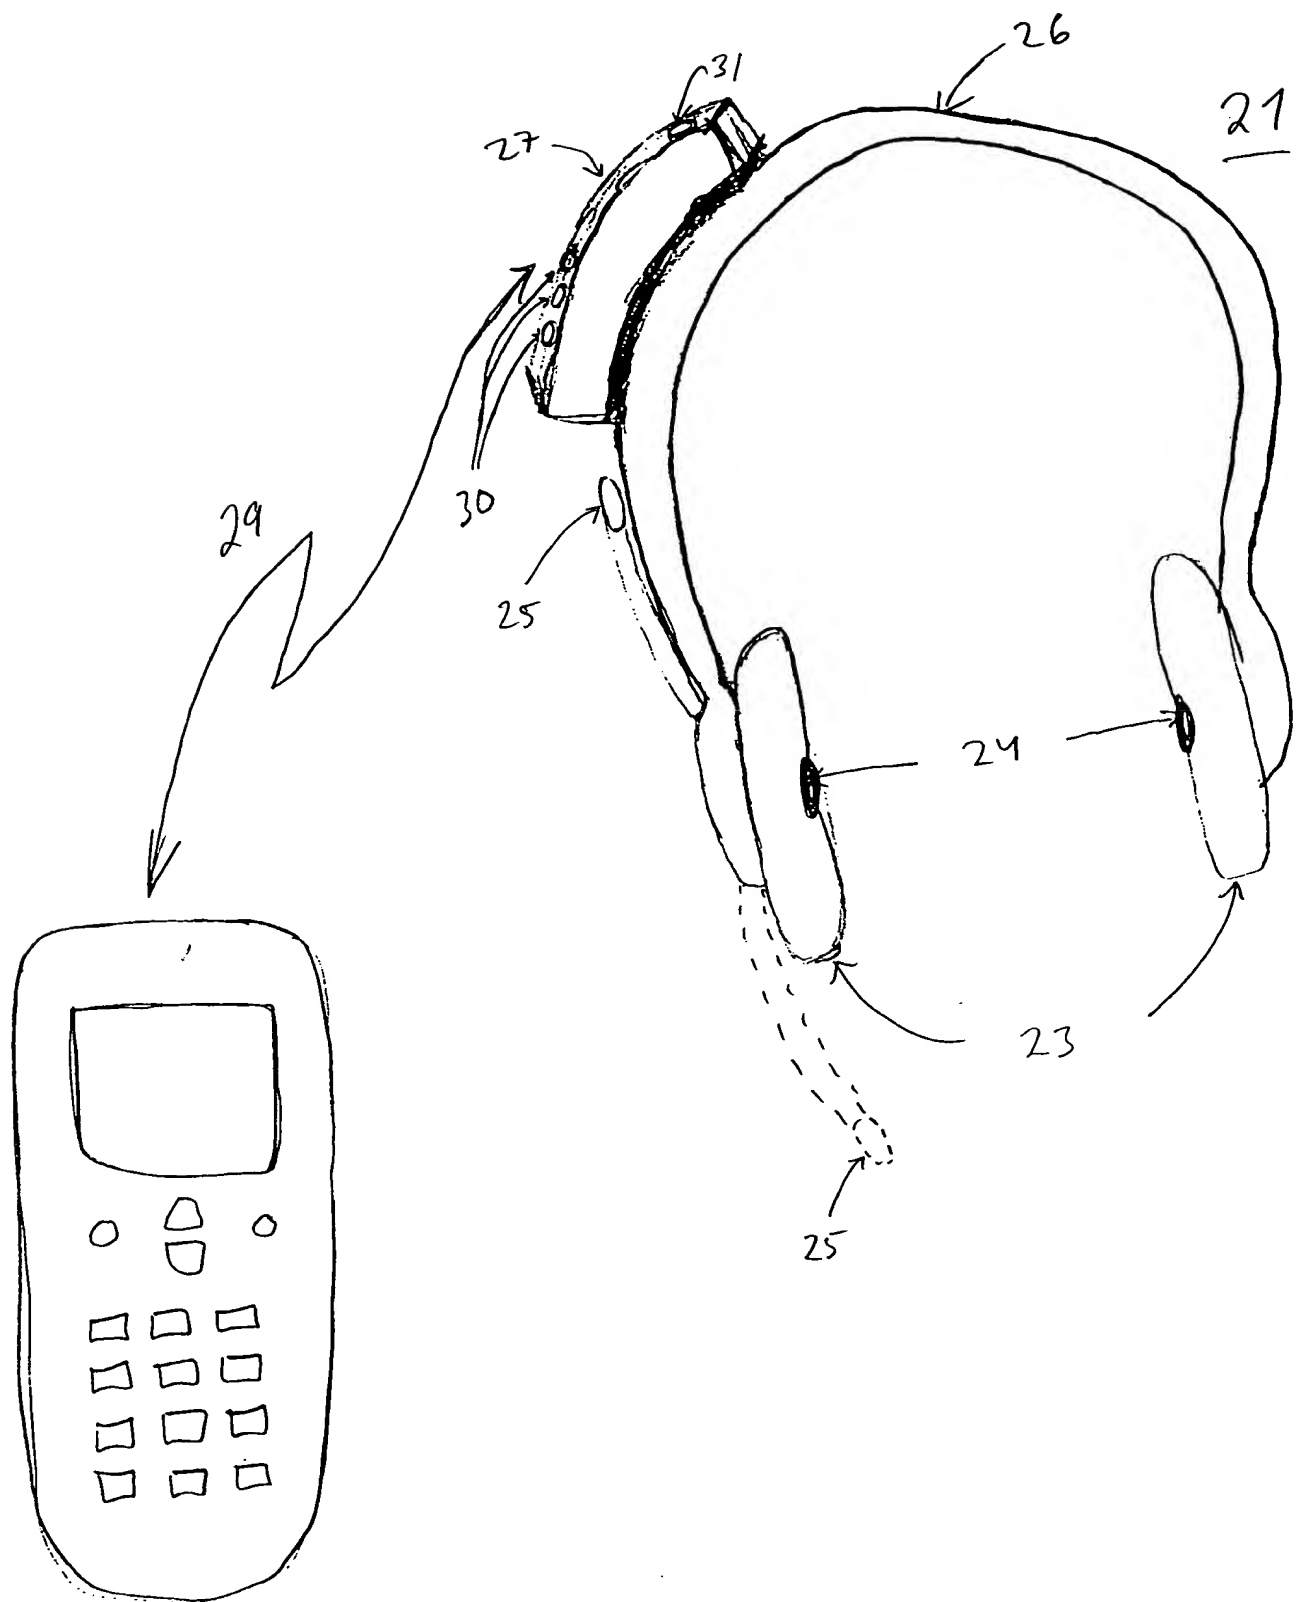


KUVIO 2

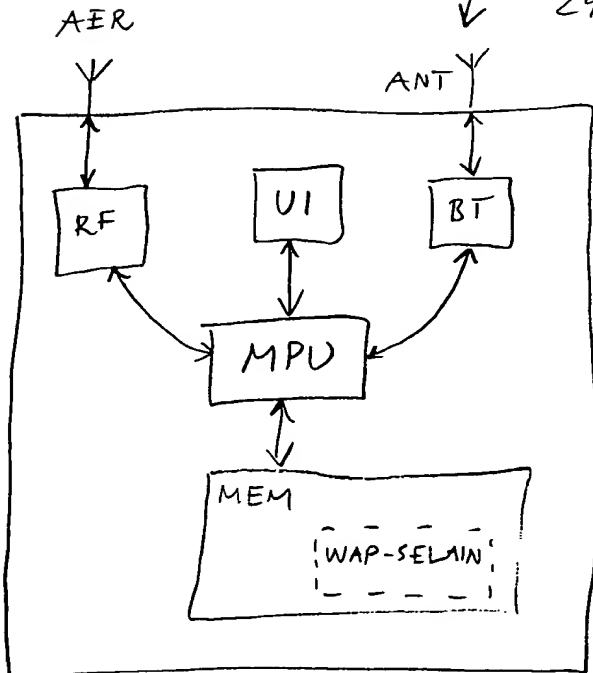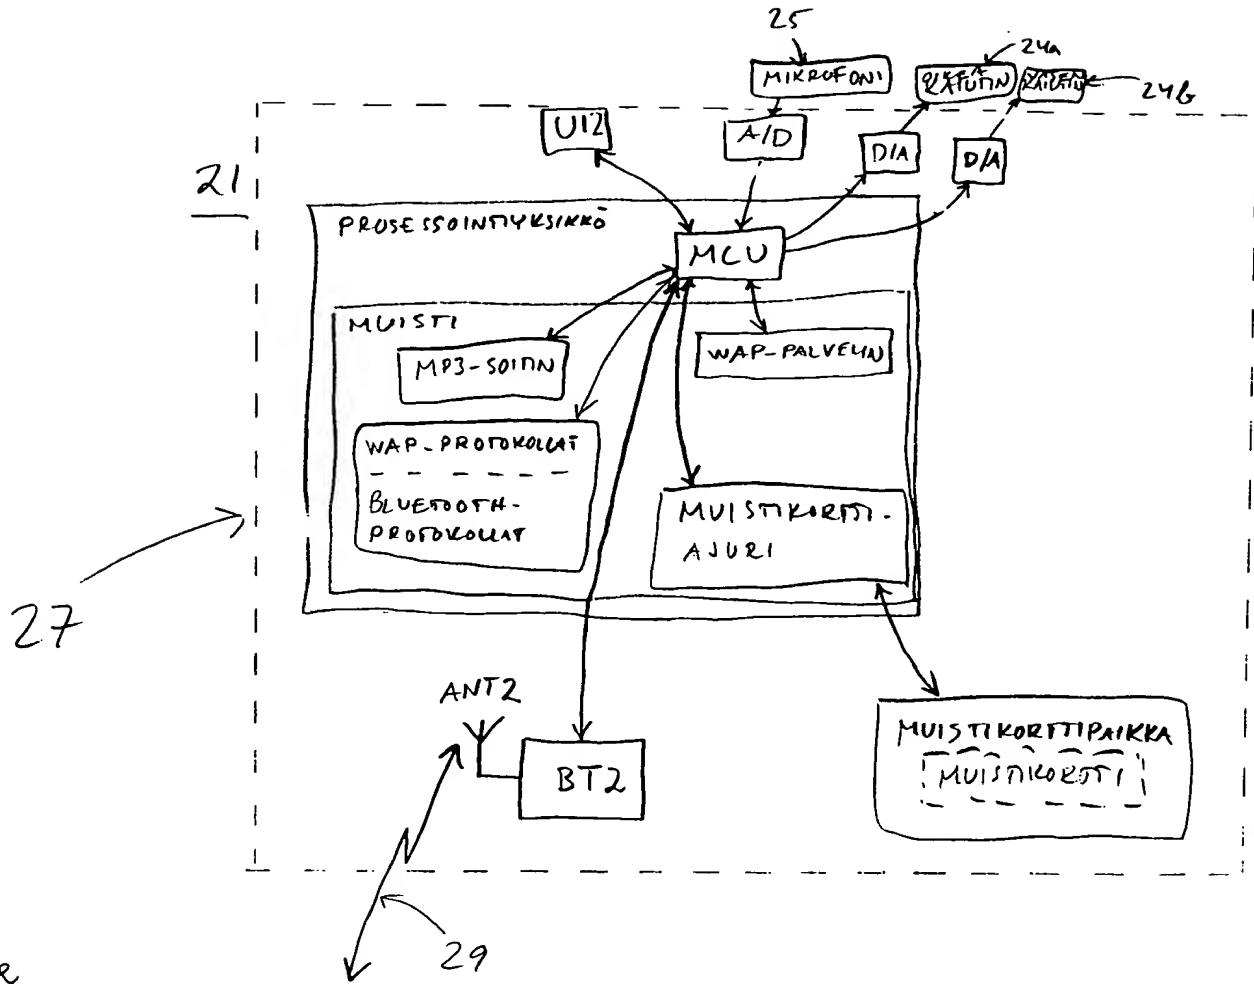


KUVIO 3

4/5

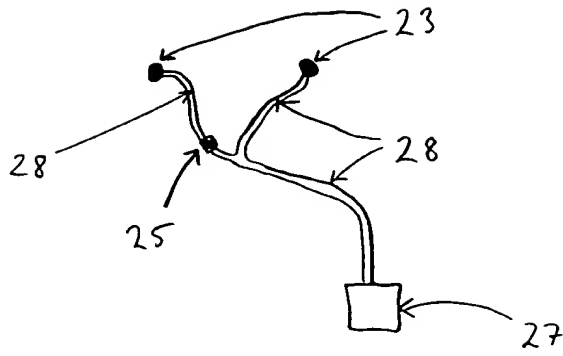

KUVIO 4



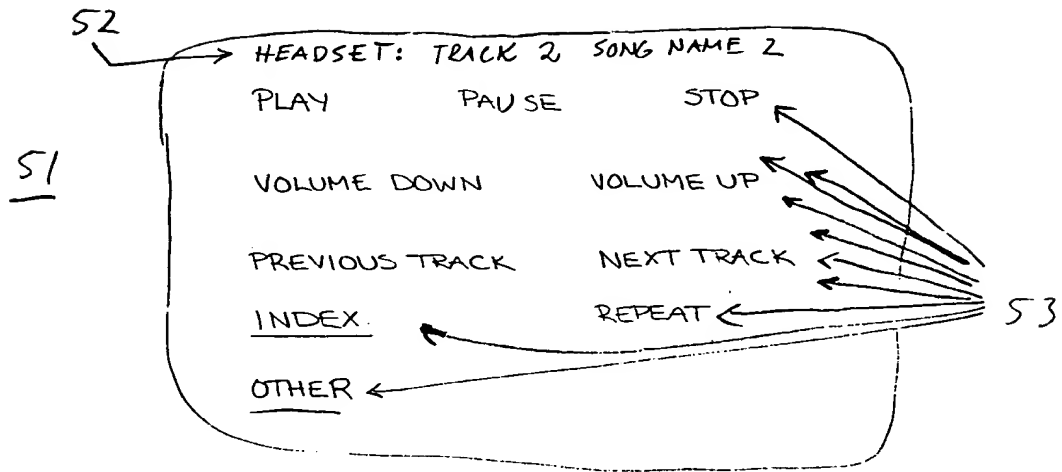

Kuvu 5a

51

INDEX	(MEMORY CARD IN HEADSET)	
1.	SONG NAME 1	2.14 MB
2.	SONG NAME 2	4.51 MB
3.	SONG NAME 3	3.38 MB
	⋮	

Kuvu 5b



I, Tiina Laurila, Iso Roobertinkatu 23, FIN-00120 Helsinki, Finland, hereby declare that I am well-acquainted with the Finnish and English languages and that annexed hereto is a true translation of Finnish Patent Application No. 20001274, filed with the Finnish Patent Office on 26 May 2000 upon which the claim to priority in the present application is based.

Helsinki, 7 August 2000

A handwritten signature in black ink, appearing to read 'Tiina Laurila', written in a cursive style.

Tiina Laurila  
Translator

## HANDS-FREE FUNCTION

The present invention relates to the hands-free function in a mobile station.

Several accessories for mobile stations are commercially available  
5 for implementing the hands-free function. Ericsson manufactures an accessory HPR-08 for a mobile station. The HPR-08 comprises two earpieces, a microphone and an FM radio module. A cord interconnects the earpieces, the microphone and the FM radio module. The FM radio module can be attached to the bottom connector of certain mobile telephone models (for example Ericsson T10). This allows the radio to be listened to via the earpieces. When a  
10 call comes in, the radio is automatically muted, and once the call has been answered (for example by pushing the yes button in the mobile telephone), the earpieces can be used for listening to the call and the microphone for talking.

The accessory HPM-10 for an Ericsson mobile station can also implement the hands-free function. The HPM-10 comprises two stereo earpieces, a microphone and an MP3 audio player. A cord comprising a button for answering a call interconnects the earpieces, the microphone and the MP3 player module. The MP3 player module can be fastened to the bottom connector of certain mobile telephone models (for example Ericsson T10). The  
15 MP3 player module is powered by the mobile telephone. This allows music to be listened to by the earpieces from the MP3 audio player. When a call comes in, the MP3 audio player is automatically muted, and the earpieces can be used for listening to the call and the microphone for talking once the call has been answered (for example by pushing the button on the cord).

25 US 5,978,689 (Figure 1) discloses an implementation that integrates an audio set and a radiotelephone into the same housing 10. The implementation also comprises earpieces 11, interconnected by a headband 12, and a microphone 13. A cord 14 can be used to connect the housing 10 and the earpiece/microphone combination 11 to 13. For this purpose, the housing  
30 10 comprises a jack 15, with which a plug 16 at the end of the cord 14 mates. With the microphone 13 in an upper position, the earpieces 11 can be used for listening to an audio program from the audio device. When the microphone 13 is moved to a lower position, the earpieces 11 and the microphone 13 can be used for listening to a call and for talking.

35 In the present invention, the hands-free function has been developed further. According to a first aspect of the invention there is provided an

apparatus for implementing a hands-free function, the apparatus comprising a mobile station and a headset, the apparatus comprising:

means for transferring an audio signal of a call between the mobile station and the headset for hands-free implementation of the call.

5 The apparatus is characterized in that the mobile station and the headset both comprise:

a short-range radio transceiver for wireless transfer of files between the mobile station and the headset, and that the headset comprises:

a memory means for storing the files.

10 According to a second aspect of the invention there is provided a headset which comprises means for transferring an audio signal of a call between the headset and a particular mobile station.

The headset is characterized in that the headset comprises:

15 a short-range radio transceiver for wireless transfer of files between said mobile station and headset, and

a memory means for storing the files.

According to the invention, a memory means, for example a memory card slot, into which a memory card is detachably connectable, is disposed in the headset or in connection thereto. Alternatively or in addition, the headset  
20 can be provided with fixed memory. The invention enables wireless transfer of files from a terminal over a short-range radio connection to the fixed memory or to the memory card detachably connectable to the memory card slot. For this purpose, the terminal and the headset comprise a short-range radio transceiver, for example an LPRF transceiver (Low Power Radio Frequency). According to an embodiment of the invention, the terminal is a mobile station in a  
25 cellular network.

An LPRF connection is a point-to-point connection, in which information, for example data, speech or video image, is transferred over the radio path at low transfer power. Bluetooth technology is an example of standardized  
30 technology using an LPRF connection. Herein, a short range refers to a range of about ten meters.

In a preferred embodiment of the invention, said files are user files. User files refer for example to files created, edited or stored by a user. User files may contain for example multimedia, such as multimedia files in the AVI  
35 format or audio/video files coded according the MPEG standard or music files, such as MP3 music files. According to an embodiment of the invention, the

headset comprises a multimedia player, such as an MP3 player, which decodes the multimedia file stored in the memory means of the headset, such as an MP3 music file. The user has the option to either listen to music decoded by the multimedia player from the earpieces of the headset or, when a call comes in, to listen to the call via the earpieces and speak to the microphone using the hands-free function.

Furthermore, according to an embodiment of the invention, the multimedia player reproduces a multimedia file comprising both image and sound. In this embodiment, the headset comprises, in addition to earpieces, a separate display means, allowing the user to follow the moving image by means of the display means and to listen to the sound via the earpieces.

According to an embodiment of the invention, a headband mechanically interconnects the earpieces comprised by the headset, both of which comprise a speaker. The headband is provided with an electronics module comprising a memory card slot, a short-range radio transceiver and a multimedia player. The user interface of the headset and the multimedia player is introduced to the terminal over an LPRF connection.

An advantage of the invention is that placing a memory card in the headset allows the size of the terminal to be kept small. In addition, when the terminal is a mobile station, the standby time of the terminal can be lengthened according to the invention as compared with a prior art solution, since in the invention, a battery placed in connection with the headset carries out the power supply of the headset independently of the mobile station. Another advantage is that, owing to the LPRF connection, no disturbing cord is required between the headset and the terminal. A further advantage is that a separate, bulky MP3 player module no longer has to be fastened to the terminal, as is the case in prior art solutions, since, according to a preferred embodiment of the invention, the memory card and the multimedia player, such as an MP3 player, are placed in the headset. At the same time, memory is released in the terminal (for example a mobile station/telephone), since the memory card for storing multimedia files is now placed in the headset. Even though the electronics module (comprising for example a memory card slot including electronics) is now placed in the headset or in connection with the headset, the size of the headset does not increase significantly, since the user interface of the headset is placed in the terminal.

In the following, the invention will be described in greater detail with

reference to the attached drawings, in which

Figure 1 shows a prior art implementation of the hands-free function,

Figure 2 shows a preferred embodiment of the invention,

5 Figure 3 is a block diagram of the headset and terminal of the invention,

Figure 4 shows an alternative embodiment of the invention, and

Figures 5a and 5b schematically show the user interface of a headset on the display of a terminal.

10 Figure 1 was explained above in connection with prior art. Figure 2 illustrates a preferred embodiment of the invention. The preferred embodiment of the invention comprises a headset 21 and a mobile telephone 22 in a cellular network.

The headset 21 comprises two stereo earpieces 23 (right and left),  
15 each of which comprises a speaker 24 for stereo playback of music. The headset 21 also comprises a microphone 25, a headband 26 and an electronics module 27. The details of the electronics module, which comprises, among other things, a Bluetooth transceiver as a short-range radio transceiver for establishing a Bluetooth connection 29 between the headset 21 and the mobile  
20 telephone 22, will be described in greater detail in connection with Figure 3. The size of the headband 26 is so arranged that, once placed on a person's head, the earpieces 23 are placed over the ears. The electronics module 27 is preferably fastened to the headband 26. For fastening, an appropriate fastening mechanism, such as a sticker or a clincher (not shown in the figure), is  
25 used. The electronics module 27, the earpieces 23 and the microphone 25 are electrically interconnected by conductors (not shown in the figure).

Alternatively (see Figure 4), if the headband 26 is not used, the earpieces 23 can be made smaller and lighter, and can thus be inserted in the ears. The electronics module 27 of the headset can be arranged as a separate  
30 portable module, cords 28 connecting the earpieces of the headset and the electronics module, and the microphone 25 can also be placed on the cord, thus being in its position of use close to a person's mouth or throat. This allows the electronics module 27 to be kept in the user's breast pocket, for example, when the earpieces 23 are in the user's ears. The electronics com-  
35 prised by the electronics module weigh about 50 to 100 grams, for example.

An alternative is for the headset not to have any microphone. In this

case, for example a directional microphone can be placed in the mobile telephone, and the user of the mobile telephone can use this microphone in the hands-free function.

Figure 3 shows block diagrams of the headset 21 and the mobile telephone 22. The electronics module 27 of the headset comprises a processing unit, which comprises a processor MCU (Master Controlling Unit). This may be a micro controller, microprocessor or DSP circuit (Digital Signal Processor), for example.

The processing unit comprises a memory, which comprises an MP3 player, i.e. an MP3 player application, a WAP server application (Wireless Application Protocol), WAP and Bluetooth protocols, and a memory card driver. The MP3 player application is capable of decoding music files coded in the MP3 format. The WAP server application is used for transferring the user interface of the headset to the mobile telephone. Data transmission between the headset and the mobile telephone is preferably carried out by the WAP and Bluetooth protocols over the Bluetooth connection 29. The memory card driver is a computer program that controls the data transmission to and from the memory card placed in the memory card slot.

The electronics module 26 comprises a Bluetooth transceiver BT2, which is capable of sending and receiving information in accordance with the Bluetooth protocols in the 2.4 GHz frequency range by means of its antenna ANT2. The antenna ANT2 can be an antenna inbuilt in the shell of the electronics module. Alternatively it can be an external antenna. The electronic module also comprises for example a lithium/polymer battery (Li-Pol) as the power source. The battery is not shown in Figure 3. Figure 3 also shows the microphone 25 in the headset 21, and an A/D converter for converting an analog audio signal coming from the microphone to the processing unit into digital form. Figure 3 further shows right and left speakers 24a, 24b in the earpieces 23, and D/A converters for converting a digital audio signal coming from the processing unit to the earpieces 23 into an analog signal.

The headset 21 also comprises a button 31, which is pressed from the headset for answering a call coming to the mobile telephone 22. Alternatively, the headset 21 may comprise a switch for indicating the position of the microphone 25, whereby a call can be answered by turning the microphone 25 from an upper position to a lower position (Figure 2). US 5,978,689 discloses a similar solution.

Although, according to the invention, the user interface of the headset 21 is introduced to the display of the mobile telephone 22 in a manner to be described later, the headset may also comprise a basic user interface UI2 (Figure 3), which gives the user an option to use the headset also without the mobile telephone. Said basic user interface UI2 may be implemented by some buttons 30 disposed in the electronics module (Figure 2) for example for activating and inactivating the playback of music and for manually adjusting the volume level in the earpieces.

The mobile telephone 22 (Figure 3) comprises a processor MPU and the following parts functionally connected to the processor: a memory MEM, a user interface UI, a radio part RF and a Bluetooth transceiver BT for establishing a Bluetooth connection between the mobile telephone 22 and the headset 21. The processor MPU is preferably a microprocessor, a micro controller or a digital signal processor (DSP). The memory MEM comprises a permanent, non-volatile memory (ROM, read only memory) and a random access memory (RAM). The radio part RF can transmit radio frequency signals, such as speech or other information in a coded form, to a base station in a cellular network, and receive signals from a base station with its antenna AER. The user interface UI provides the user with a display and a keyboard for using the mobile telephone 22. According to the invention, the user interface of the headset 21 is introduced to the user interface UI of the mobile telephone, whereby the mobile telephone is able to control the functions of the headset. The Bluetooth transceiver BT is able to transmit and receive information in the 2.4 GHz frequency range with its antenna ANT in accordance with Bluetooth protocols. The antenna may be an inbuilt antenna. It may alternatively be an external antenna.

The software of the mobile telephone 22 is typically stored in the permanent memory. The processor MPU uses the software to control the operation of the mobile telephone 22, such as the use of the radio part RF and the Bluetooth transceiver BT, the display of information at the user interface UI and the reading of inputs received from the user interface UI. The software comprises WAP and Bluetooth protocols and a WAP browser application, i.e. what is known as a micro browser. The processor MPU uses the RAM as a temporary buffer memory when processing information. The WAP browser application can be used in a known manner for searching for and retrieving files, such as music files, from the Internet.

According to the invention, the user interface of the headset 21 is introduced to the mobile telephone 22. This is preferably accomplished with WAP over Bluetooth technology. The headset comprises a WAP server application and the mobile telephone a WAP browser application. The WAP browser application and the WAP server program communicate over the Bluetooth connection using WAP protocols. Thus the WAP browser program can request that the user interface of the headset be transferred from the headset to the mobile telephone for example as a WML page or pages (Wireless Markup Language). WML Script objects can be combined with WML pages. Alternatively, a special application can be made and used instead of WAP over Bluetooth technology for transferring the user interface of the headset 21 over the Bluetooth connection to the mobile telephone 22.

Figures 5a and 5b are highly simplified exemplary figures of the user interface of the headset 21 on the display of the mobile telephone 22 as WML pages, i.e. as what is known as a WML deck. Figure 5a shows a card of the WML deck, i.e. a WML page, on the display 51 of the mobile telephone 22. Displaying information on the display 51 is typically controlled by a part of the software of the mobile telephone 22 called a display controller. The topmost line, i.e. a header line 52, shows the header of the WML page, in the case of Figure 5a, the word 'HEADSET'. The header line may also show the number of the piece of music to be played, 'TRACK 2' and/or the title of the piece to be played, 'SONG NAME 2'. In addition to the header line 52, several function words 53 are shown to the user. The user may move to the desired function word for example by using the scroll key (not shown in the figure) in the mobile telephone and activate the function by pressing the enter key in the mobile station or some other corresponding selection key (not shown in the figure). In the example of Figure 5a, the underlining of the function word 53 means that the activation of said function opens a new card from the WML deck on the display of the mobile telephone, i.e. a new WML page, which again shows new functions to be selected. The activation of the PLAY function starts the playback of a music file. The PAUSE function interrupts the playback, and the playback can be resumed with the PLAY function from the point at which the playback was interrupted. The STOP function terminates the playback. The VOLUME DOWN function lowers the volume level of the earpieces. The VOLUME UP function increases the volume level of the earpieces. The PREVIOUS TRACK function initiates the playback from the beginning of the



previous piece of music. The NEXT TRACK function initiates the playback from the beginning of the next piece of music. The REPEAT function is used to repeat the same piece. The OTHER function opens a new WML page including more functions, such as functions relating to the tone and balance of sound (not shown in the figure). The INDEX function opens a new WML page, which is illustrated in Figure 5b.

Figure 5b illustrates a WML page showing the contents of a memory card inserted in the headset as an index. The index comprises information on the files/pieces of music stored in the memory card. In addition to the name of the file/piece of music 'SONG NAME 1, SONG NAME 2, SONG NAME 3, ...', said information may include for example the size of the file/piece of music. In the case of Figure 5b, the size of the piece of music SONG NAME 1 is 2.14 megabytes, that of SONG NAME 2 4.51 megabytes and that of SONG NAME 3 3.38 megabytes.

Let us next study an embodiment of the invention, which allows the user of the mobile station 22 to use the headset to listen to music and to speak by using the hands-free function. Herein, the use of the invention requires a headset 21 and a mobile telephone 22 of a cellular network. The cellular network may be for example a GSM network (Global System for Mobile Communications), a third generation mobile communication network or some other mobile communication network.

To start with, a memory card is inserted in the memory card slot of the headset 21. The memory card may include pre-stored MP3 music files, which are stored for example by means of a computer. Alternatively, the WAP browser in a mobile telephone can be used to search a communications network, such as the Internet, for MP3 music files to the mobile telephone in accordance with WAP protocols. The MPU can further be used to transfer the MP3 music files via the Bluetooth transceiver in the mobile telephone over the Bluetooth connection to the Bluetooth transceiver in the headset and further by the processing unit via the memory card driver to the memory card slot to the memory card.

The user is now able to start the playback of a piece of music either by activating the PLAY function from the user interface of the headset 21 introduced to the mobile telephone 22 or by pressing button 30 in the basic user interface UI2 in the headset (if the basic user interface is implemented in the headset). The MP3 player application in the headset then starts to decode the

MP3 music file and the processing units transfers the decoded data to the D/A converters, which, in turn, convert the data from digital to analog form for the speakers 24a, 24b in the earpieces 23. The speakers 24a, 24b convert the analog signal into sound audible to the user.

5           Should the user for example wish to adjust the volume level of the earpieces 23 higher, this is accomplished from the mobile telephone 22 by activating the VOLUME UP function. Information on the activation of the VOLUME UP function is transferred from the user interface UI in the mobile telephone via the processor MPU, the Bluetooth transceiver BT and the antenna ANT in accordance with WAP and Bluetooth protocols across the Bluetooth connection 29 to the headset 21. In the headset, the information is conveyed via the antenna ANT2 to the Bluetooth transceiver BT2 and further to the processing unit. When the VOLUME UP function is concerned, the processing unit then adjusts the volume level of the earpieces 23 a step higher.

10           Information on the activation of the other functions (e.g. STOP, PAUSE etc.) is conveyed similarly from the mobile telephone to the headset.

          When the user is listening to music and a call is incoming to the mobile telephone 22, the user can answer the call by turning the microphone 25 in the headset from the upper position to the lower position, whereby the playback of music stops. Alternatively, the call can be answered for example by pushing the answer key in the mobile telephone 22.

          When the user of the mobile telephone wishes to make a call, he can make the call with the mobile telephone 22. The user can again use the earpieces 23 of the headset for listening to the call and the microphone 25 for talking. As the call is conveyed from the headset to the telephone and further towards a base station of the cellular network, the analog audio signal received by the microphone 25 is converted in the A/D converter into a digital signal, which is transferred to the processing unit of the headset 21. In the processing unit, the processor MCU transfers the digital signal to the Bluetooth transceiver BT2, which sends the signal over the radio path via the antenna ANT2 over the Bluetooth connection 29 to the mobile telephone 22. In the mobile telephone, the signal is received via the antenna ANT to the Bluetooth transceiver BT, from which it is transferred for processing to the MPU and further via the antenna AER in the radio part RF of the mobile telephone to the base station of the cellular network and further to the party receiving the call.

30           When a call propagates in the opposite direction, a digital audio signal is con-

veyed through said blocks in the opposite order with the exception that, in the headset, instead of to the A/D converters and the microphone, the digital audio signal is conveyed from the processing unit to the D/A converters in which the digital signal is converted into an analog audio signal. The analog signal is  
5 conveyed to the speakers 24a, 24b for playback.

The user of the mobile telephone is able to terminate the call for example by lifting the microphone 25 to the upper position, and the playback of music can continue. The playback of music can continue for example automatically from the point when the playback was interrupted as the call came in.

10 The present MP3 compression makes it possible to store one minute of music in a one-Megabyte memory. Accordingly, for example an 8-Megabyte memory card fits about eight minutes of music, a 16-Megabyte memory card about 16 minutes of music and a 64-Megabyte memory card slightly more than an hour of music.

15 Alternatively, the MP3 player can be installed in a mobile telephone, in which case a music file, when being played, is first transferred over a Bluetooth connection to the mobile telephone to be decoded by the MP3 player. The decoded audio signal is then sent over the Bluetooth connection to the headset to be listened to by the user.

20 Alternatively, an FM radio receiver can also be integrated into the headset, giving the user the option to listen to a radio program in addition to listening to the music files on the memory card. An FM radio receiver is lightweight, and can therefore be installed in the headband of the headset together with its basic user interface. The user interface of the FM radio receiver can  
25 also be introduced over the Bluetooth connection to the display of the mobile telephone, as can the rest of the user interface of the headset.

In an alternative embodiment of the invention, a multimedia file in the AVI format is transferred over a Bluetooth connection from the mobile telephone 22 to the headset 21. In this embodiment the headset comprises, in  
30 addition to earpieces, a separate display means. A multimedia player in the headset decodes said AVI file, allowing the user to follow the image on the display and listen to the sound with the earpieces. The display means may be for example a display, which is fastened to the headset 21 by means of a pivot and which the user can turn in front of the eyes when needed. Alternatively, a  
35 wrist TV set can be implemented, onto the display of which the image can be transferred along a cord. Instead of the AVI format, the multimedia file can

also be in some other multimedia format, such as MPEG.

Since the physical size of mobile telephones continues to diminish, it is increasingly difficult to integrate memory card slots into a mobile telephone. The size of a commercially available memory card is about 1 x 25 x 32  
5 mm, which means that the memory card slot takes up considerably more space in the mobile telephone. According to a preferred embodiment of the invention, at least one memory card slot is placed in the headset instead of the mobile telephone, and therefore space equal to a memory card slot is saved in the mobile telephone. Space is also saved in the mobile telephone because  
10 the electronics included in said memory card slot are also placed in the headset.

As was stated in association with an alternative embodiment of the invention, the user can transfer over a Bluetooth connection to storage, not only music files but also other information, such as audio/video files or other  
15 multimedia files for which there is no space in the limited memory (e.g. 4 Megabytes) of the mobile station. Said files can be transferred back from the memory card over the Bluetooth connection to the mobile telephone if and when the user needs them in the mobile telephone. The processor MPU of the mobile telephone controls the transfer. The transfer of files from the memory  
20 of the mobile telephone to the memory card in the headset releases memory in the mobile telephone.

Alternatively, instead of or in addition to the memory card slot and the memory card, fixed memory can be placed in the electronics module of the headset to be used for music or other files of the user of the mobile telephone.

25 The implementation and embodiments of the invention are described in the description only by way of example. It is obvious to a person skilled in the art that the invention is not restricted to the details of the above embodiments and that the invention can be implemented also in other forms without deviating from its characteristics. For example the software related to  
30 the invention can be implemented in several ways. The headset may also comprise only one earpiece instead of two. The headset may also comprise more than two speakers. The embodiments presented should be considered as illustrative, not restrictive. Hence the optional implementations and uses of the invention are only limited by the attached claims. Consequently, the different  
35 alternative embodiments of the invention, including equivalent embodiments, defined by the claims, are within the scope of the invention.

## CLAIMS

1. An apparatus for implementing a hands-free function, the apparatus comprising a mobile station (22) and a headset (21), the apparatus comprising:

5 means for transferring an audio signal of a call between the mobile station (22) and the headset (21) for hands-free implementation of the call, **characterized** in that the mobile station (22) and the headset (21) both comprise:

a short-range radio transceiver (BT, BT2) for wireless transfer of files between the mobile station (22) and the headset (21), and that the headset comprises:

a memory means for storing the files.

2. An apparatus as claimed in claim 1, **characterized** in that the headset (21) is arranged to:

15 receive a particular file from the mobile station (22) with the short-range radio transceiver (BT2); and

store said file in the headset (21).

3. An apparatus as claimed in claim 1 or 2, **characterized** in that said files are user files.

20 4. An apparatus as claimed in claim 1, **characterized** in that the headset (21) comprises as a memory means one of the following: fixed memory, a memory card slot to which a memory card is detachably connectable.

25 5. An apparatus as claimed in claim 1, **characterized** in that the headset (21) comprises a speaker (24) and a microphone (25).

6. An apparatus as claimed in claim 1, **characterized** in that the headset (21) comprises a user interface and that the mobile station (22) is arranged to control the user interface of the headset over a short-range radio connection (29).

30 7. An apparatus as claimed in claim 1, **characterized** in that the headset comprises a multimedia player.

8. An apparatus as claimed in claim 7, **characterized** in that the headset (21) comprises two earpieces (23) and as a multimedia player an audio player, which is arranged to play music in the earpieces.

35 9. An apparatus as claimed in claim 8, **characterized** in that the audio player is arranged to play music by decoding a music file, which is

stored in said memory means in the headset.

10. An apparatus as claimed in claim 7, **characterized** in that the multimedia player comprises a number of functions, and that the mobile station (22) is arranged to control said functions over a short-range radio  
5 connection (29).

11. An apparatus as claimed in claim 1, **characterized** in that the mobile station is one of the following: a mobile telephone, a mobile station of a cellular network.

12. A method as claimed in claim 1, **characterized** in that  
10 said short-range radio connection (29) is a Bluetooth connection.

13. A headset comprising means for transferring an audio signal of a call between the headset (21) and a particular mobile station (22), **characterized** in that the headset comprises:

a short-range radio transceiver (BT2) for wireless transfer of files  
15 between said mobile station (22) and the headset (21), and  
a memory means for storing the files.

14. A headset as claimed in claim 13, **characterized** in that the headset (21) comprises two earpieces (23) interconnected with a headband (26).

20 15. A headset as claimed in claim 14, **characterized** in that said headband (26) comprises an electronics module (27) comprising said memory means and short-range radio transceiver (BT2).

16. A headset as claimed in claim 15, **characterized** in that said electronics module further comprises a multimedia player.

(57) ABSTRACT

The invention relates to a apparatus for implementing a hands-free function, the apparatus comprising a mobile station (22) and a headset (21). The apparatus comprises means for transferring an audio signal of a call between the mobile station (22) and the headset (21) for hands-free implementation of the call. The mobile station (22) and the headset (21) both comprise a short-range radio transceiver (BT, BT2) for wireless transfer of files between the mobile station (22) and the headset (21). The headset comprises a memory means for storing the files in the headset. The invention also relates to a headset (21).

Figure 3.

1/5

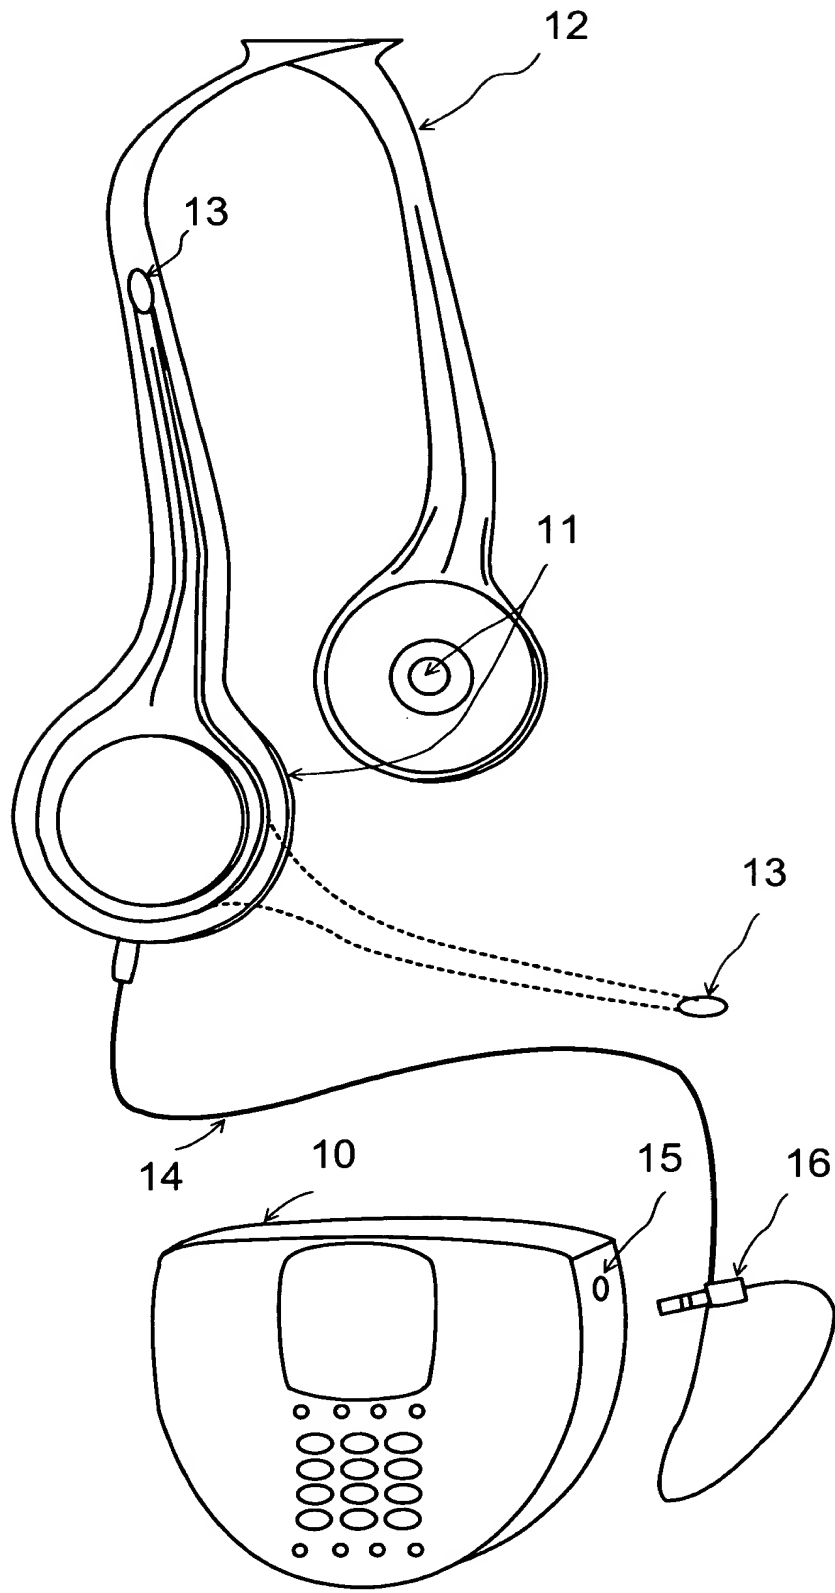


FIG. 1  
PRIOR ART



2/5

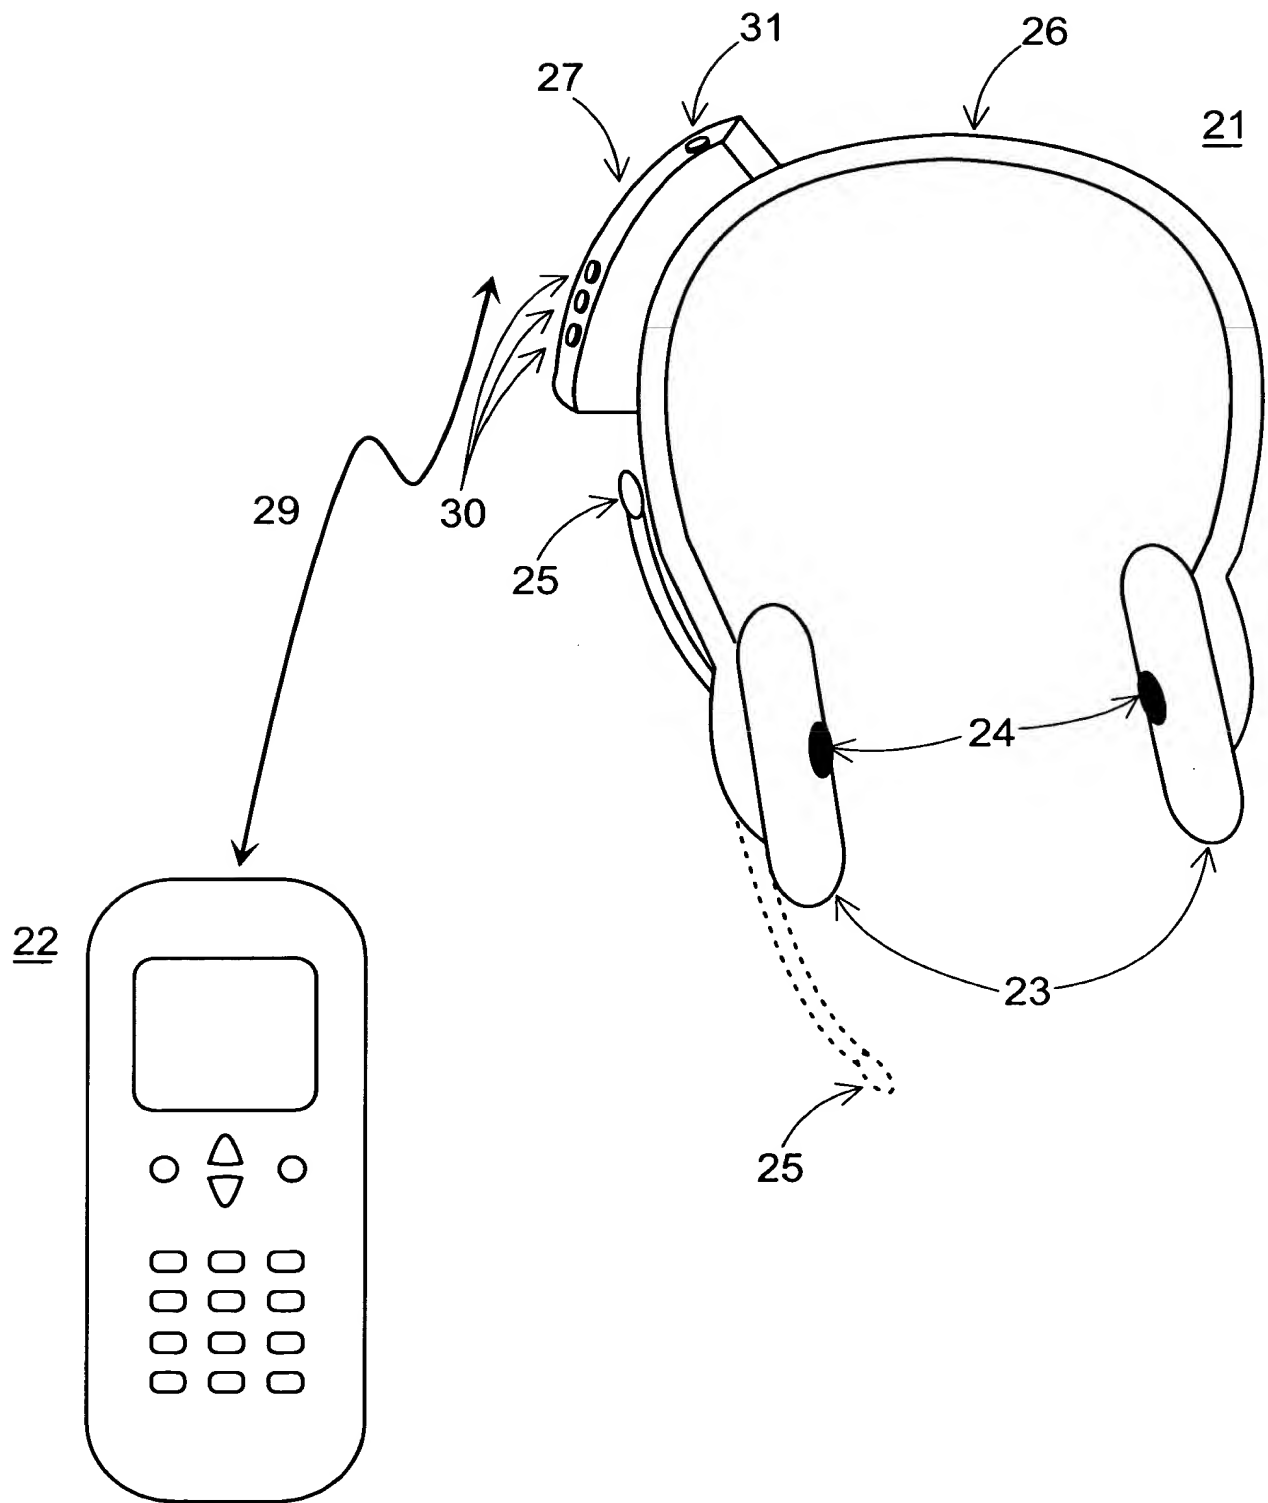


FIG. 2

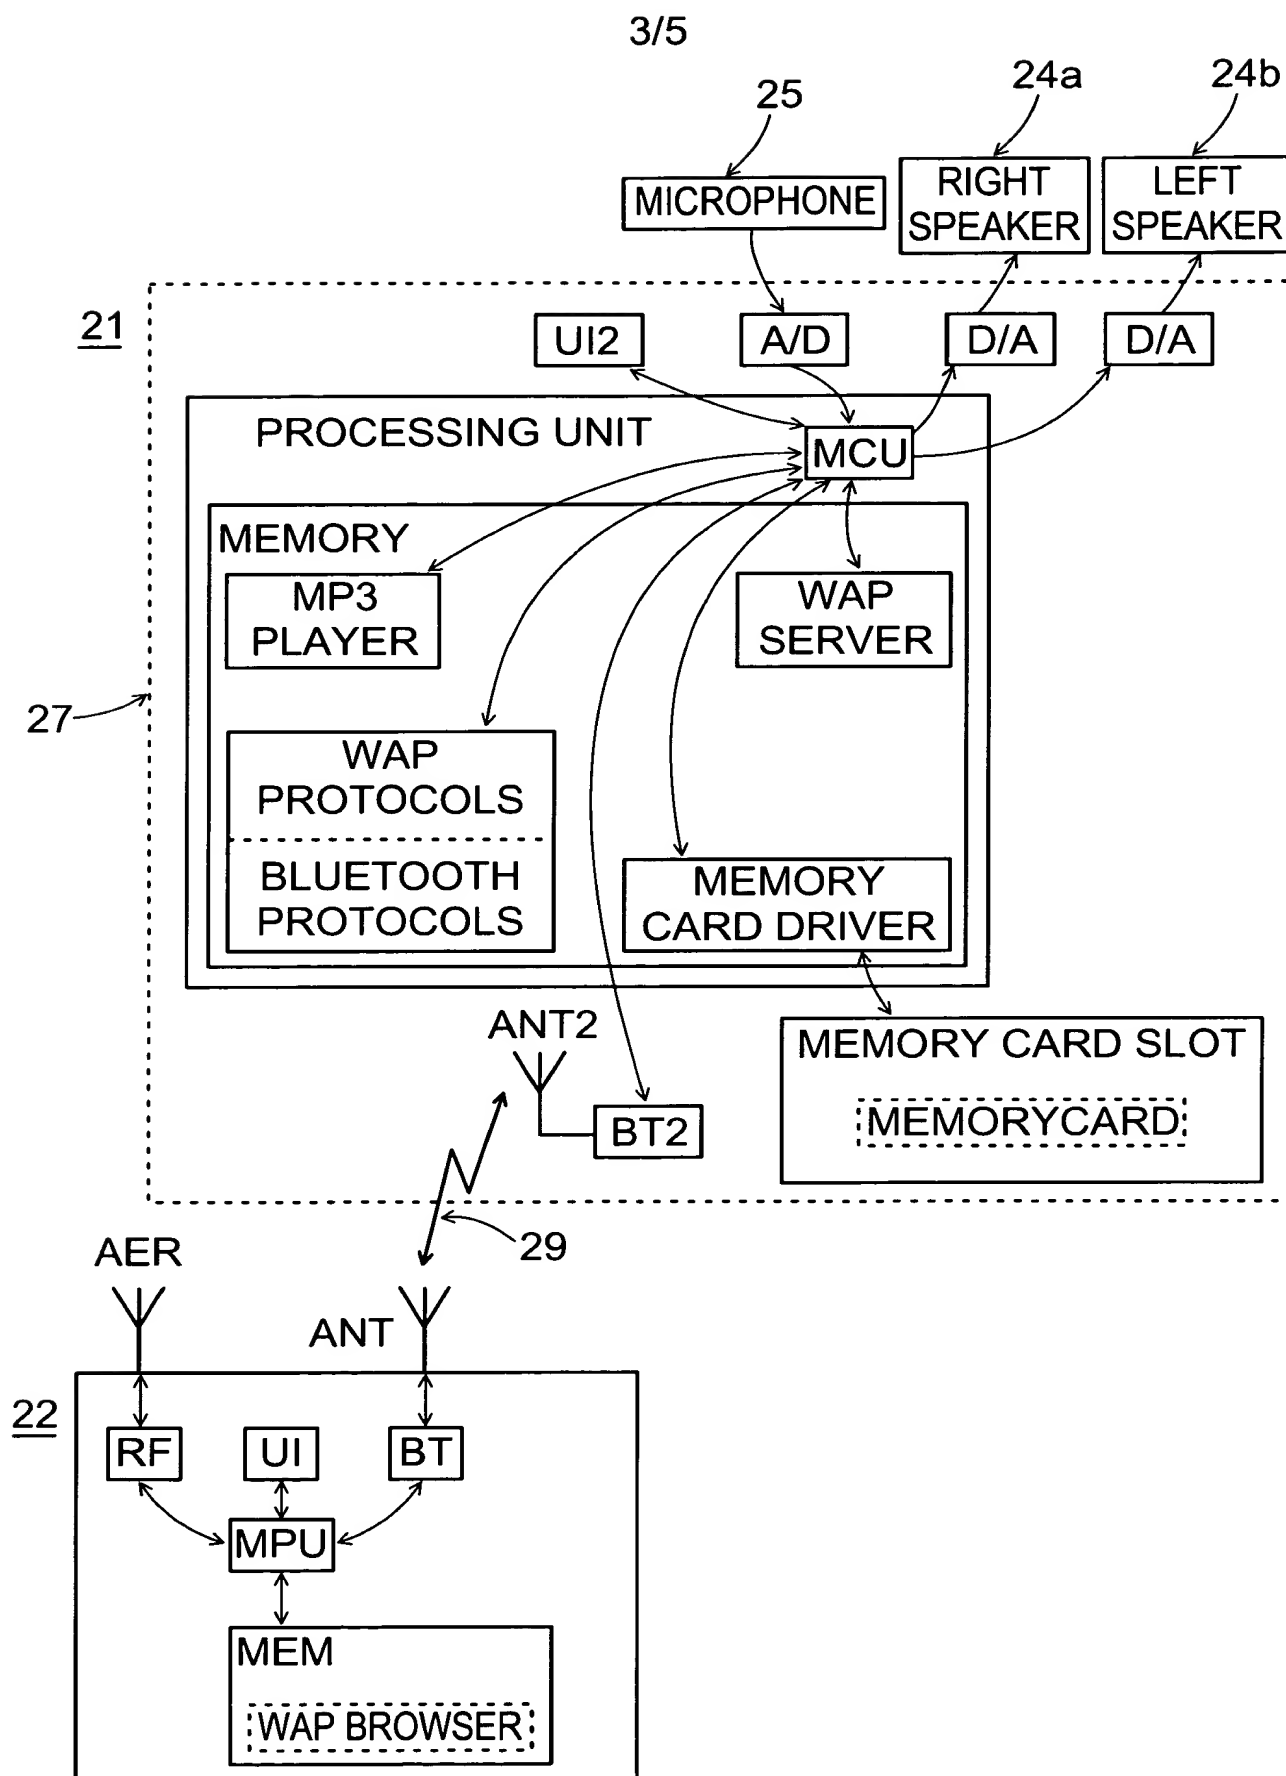


FIG. 3

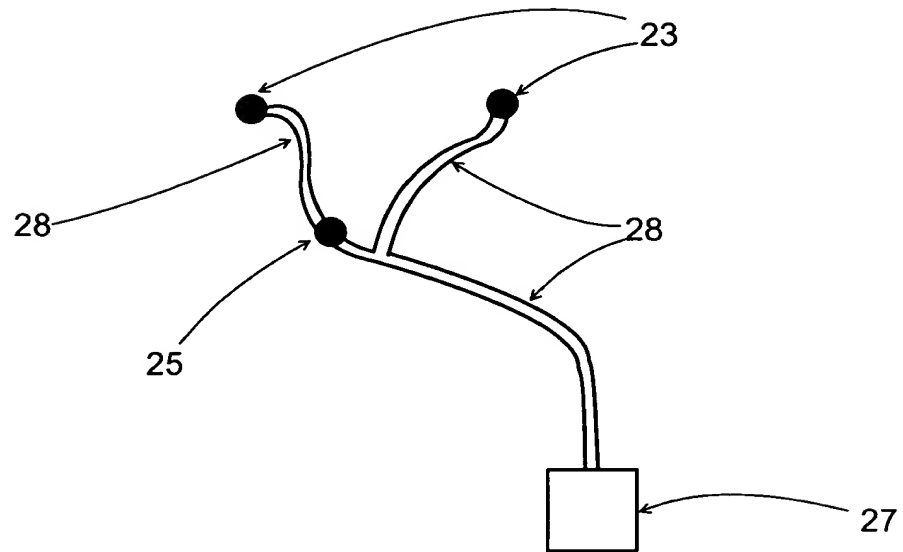


FIG. 4

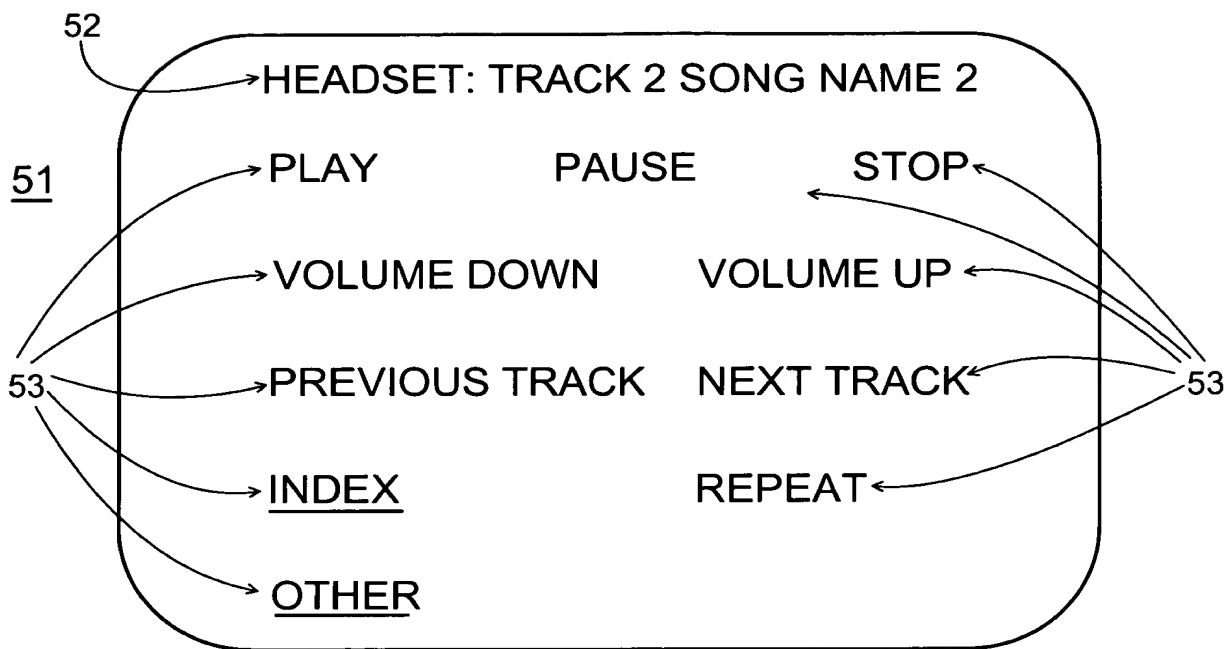


FIG. 5a

INDEX	(MEMORY CARD IN HEADSET)
1. SONG NAME 1	2.14 MB
2. SONG NAME 2	4.51 MB
3. SONG NAME 3	3.38 MB
•	
•	
•	

FIG. 5b